


CONVEYOR BELTS FOR PACKAGING AND CONFECTIONARY

LOW FRICTION

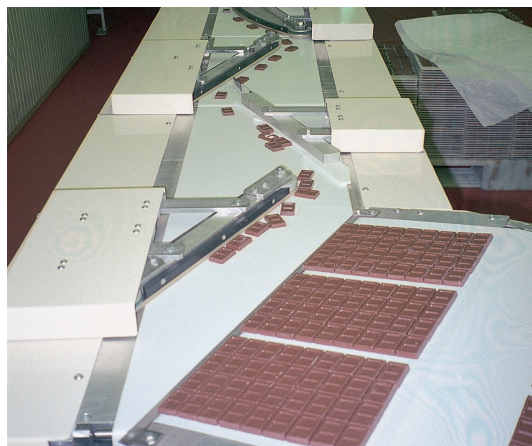

Features and advantages of CHIORINO
LOW FRICTION conveyor belts:

- Suitable for accumulation
- High adhesive properties, enabling excellent product release (ex. shrinkwrap film, labels, etc.)
- Compliance with hygiene standards: the "HP" polyurethane cover conforms to the HACCP criteria
- 2M5 U0-U2 HP VL blue A purposely designed with special extra-matt finish allowing perfect accumulation
- FDA approved
- Antistatic

	Textile carcass	Conveying surface coating		Driving surface coating		FDA approved	Perman. antist.	Total thickness [mm]	Weight [kg/m ²]	Min. diameter (1) [mm]	Pull for 1% elongat. [N/mm]	Max. adm. pull [N/mm]	Temperature resistance [°C]	
		material	colour	material	colour								min.	max.
1M5 U0-U2 WA	polyester	polyurethane	○	polyurethane impregnation	○	yes	yes	0,7	0,8	knife edge	5	5	-20	+100
1M5 U0-U2 WA LFVL	"	"	○	"	○	yes	yes	0,7	0,8	knife edge	5	5	-20	+100
2M5 U0-U0 HPA	"	polyurethane impregnation	○	"	○	yes	yes	1,0	1,0	knife edge	6	12	-30	+110
2M5 U0-U2 HPVL blue A	"	polyurethane	●	"	●	yes	yes	1,3	1,4	knife edge	6	12	-30	+110
2M5 U0-U2 LFWA	"	"	○	"	○	yes	yes	1,3	1,5	knife edge	6	12	-20	+100

(1) Minimum roller diameter is dependent on the joint recommended by CHIORINO.

The data of this table have been formulated under normal environment conditions. They are subject to alteration without notice.