


## C-U 20/120 HP Compact blue AM


### DESCRIPTION

Sidewalls fitted longitudinally.

PRODUCT SYSTEM 

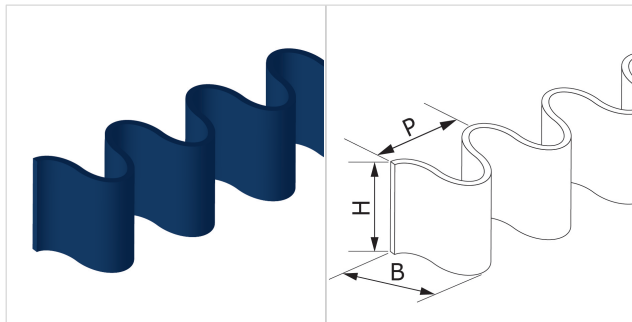

### TECHNICAL SPECIFICATIONS

Material	Polyurethane (TPU) - HP® system		
Colour	HP® blue		
Hardness	92 ±5 Sh.A		
B = Base	42 mm	1,65 in.	
H = Height	120 mm	4,72 in.	
P = Pitch	40 mm	1,57 in.	
Thickness	2.7 mm	0,11 in.	
Weight	223 gr/m	0.198 oz/in.	
Minimum pulley diameters <sup>(1)</sup>			
 longitudinal-conveying side	290 mm	11.4 in.	
<sup>(1)</sup> Minimum pulley diameters referred to environment conditions of 20°C			
Temperature resistance <sup>(2)</sup>	min.	-30 °C	-22 °F
	max	70 °C	158 °F
<sup>(2)</sup> Use with limit values may reduce its life			
Preformed or multiple roll length	25.0 m	82.0 ft	

### COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)



### METHOD OF APPLICATION

- High frequency welding

### NOTES

Issue: 22-01-2020

Last Update: 12-07-2023

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.