


PROFILES and GUIDES

TECHNICAL DATA SHEET

ES105 L40 RF CODE **TYPE**

DESCRIPTION

PVC inclined lateral profile, flat base without groove.

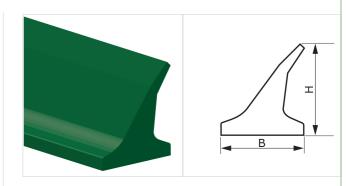

TECHNICAL SPECIFICATIONS

(PVC)	oride (P	ıyl chl	Polyvin		Material
Sh.	60 ±5				Hardness
Greei	G				Colour
Fla					Base
9 ir	0.79	mm	20.0		B Upper base
ir		mm			b Bottom base
7 ir	1.57	mm	40.0		H Height
6 oz/ii	0.336	gr/m	378		Weight
					Minimum pitch
- ir		mm			longitudinal
0 ir	2.0	mm	50		■ transversal
				eters ⁽¹⁾	Minimum pulley diame
i		mm		side	longitudinal-driving
i		mm		ing side	longitudinal-convey
2 i	3.2	mm	80	ng side	■ transversal-conveyi
	°C	ons of 20	ent condition	rred to environm	(1) Minimum pulley diameters refe
4 •	14	°C	-10	min.	Temperature
0 •	140	°C	60	max	resistance (2)
				ce its life	(2) Use with limit values may redu
.9 f	7.9	m	2.4		Roll/bar sizes

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

METHOD OF APPLICATION

- High frequency welding

NOTES

Last Update: 22-01-2020 Issue: 22-01-2020

DISCLAIMER
The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.