

SIDEWALLS

TECHNICAL DATA SHEET

CODE **ES1060**


TYPE

C-U 20/60 LB ProDrive

DESCRIPTION

Sidewalls fitted longitudinally.

PRODRIVE™

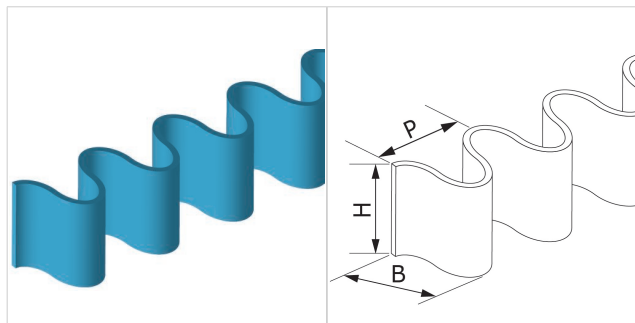

TECHNICAL SPECIFICATIONS

Material	Polyurethane (TPU)	
Colour	Light blue	
Hardness	85 \pm 5 Sh.A	
B = Base	42 mm	1,65 in.
H = Height	60 mm	2,36 in.
P = Pitch	50 mm	1,97 in.
Thickness	1.7 mm	0,07 in.
Weight	108 gr/m	0.096 oz/in.

Minimum pulley diameters⁽¹⁾

■ longitudinal-conveying side	150 mm	5.9 in.
-------------------------------	--------	---------

⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance ⁽²⁾	min.	-20 °C	-4 °F
	max	70 °C	158 °F

⁽²⁾ Use with limit values may reduce its life

Preformed or multiple roll length	25.0 m	82.0 ft
-----------------------------------	--------	---------

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
EC 1935/2004 Regulation and Amendments
EC 2023/2006 Regulation and Amendments
EU 10/2011, 2023/1442 Regulation and Amendments
FDA (Food and Drug Administration)



METHOD OF APPLICATION

- High frequency welding

NOTES

Issue: 16-10-2024

Last Update: 16-10-2024

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.