


PROFILES and GUIDES

TECHNICAL DATA SHEET

ES106 **L40 RF W** CODE **TYPE**

DESCRIPTION

PVC inclined lateral profile, flat base without groove.

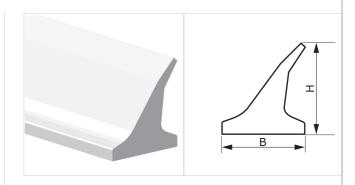

TECHNICAL SPECIFICATIONS

/C)	oride (P	ıyl chl	Polyvin		Material
Sh.A	60 ±5 \$				Hardness
hite	W				Colour
Flat					Base
in.	0.79	mm	20.0		B Upper base
in.		mm			b Bottom base
in.	1.57	mm	40.0		H Height
oz/in	0.336	gr/m	378		Weight
					Minimum pitch
in.		mm			longitudinal
in.	2.0	mm	50		■ transversal
				eters ⁽¹⁾	Minimum pulley diame
in		mm		side	longitudinal-driving
in		mm		ing side	longitudinal-conveyi
in	3.2	mm	80	ng side	■ transversal-conveyi
	°C	ons of 20°	ent condition	erred to environm	(1) Minimum pulley diameters refe
۰F	14	°C	-10	min.	Temperature
٥F	140	°C	60	max	resistance (2)
				uce its life	(2) Use with limit values may redu
ft	7.9	m	2.4		Roll/bar sizes

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments FDA (Food and Drug Administration)

METHOD OF APPLICATION

- High frequency welding

NOTES

Last Update: 22-01-2020 Issue: 22-01-2020

DISCLAIMER
The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.