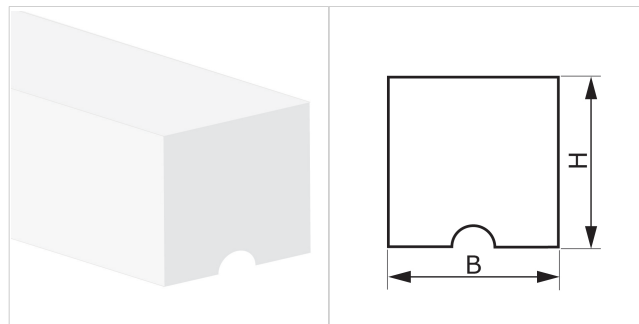


**CODE ES173**
**TYPE**
**S20 W**
**DESCRIPTION**

Profile fitted transversally or longitudinally.


**TECHNICAL SPECIFICATIONS**

Material	Polyvinyl chloride (PVC)		
Hardness	60 ±5 Sh.A		
Colour	White		
Base	Grooved		
B Upper base	20.0 mm	0.79	in.
b Bottom base	--- mm	---	in.
H Height	15.0 mm	0.59	in.
Weight	349 gr/m	0.310	oz/in.
Minimum pitch			
■ longitudinal	60 mm	2.4	in.
■ transversal	60 mm	2.4	in.
Minimum pulley diameters <sup>(1)</sup>			
■ longitudinal-driving side	220 mm	8.7	in.
■ longitudinal-conveying side	350 mm	13.8	in.
■ transversal-conveying side	130 mm	5.1	in.
<sup>(1)</sup> Minimum pulley diameters referred to environment conditions of 20°C			
Temperature resistance <sup>(2)</sup>	min.	-10 °C	14 °F
	max	60 °C	140 °F
<sup>(2)</sup> Use with limit values may reduce its life			
Roll/bar sizes	50.0 m	164.0	ft

**COMPLIANCES**

 REACH EC 1907/2006 Regulation and Amendments  
 FDA (Food and Drug Administration)

**METHOD OF APPLICATION**

- Hot air welding
- High frequency welding

**NOTES**

Issue: 22-01-2020

Last Update: 22-01-2020

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.