


CODE	ES30		TYPE	K13 P W	
DESCRIPTION					
Profiles mainly fitted on conveyor belts as guides.					
TECHNICAL SPECIFICATIONS					
Material	Polyvinyl chloride (PVC)				
Hardness	60 ±5 Sh.A				
Colour	White				
Base	Flat				
B Upper base	13.0 mm	0.51	<i>in.</i>		
b Bottom base	7.0 mm	0.28	<i>in.</i>		
H Height	8.0 mm	0.31	<i>in.</i>		
Weight	98 gr/m	0.087	<i>oz/in.</i>		
Minimum pitch					
■ longitudinal	45 mm	1.8	<i>in.</i>		
■ transversal	45 mm	1.8	<i>in.</i>		
Minimum pulley diameters ⁽¹⁾					
■ longitudinal-driving side	80 mm	3.2	<i>in.</i>		
■ longitudinal-conveying side	130 mm	5.1	<i>in.</i>		
■ transversal-conveying side	---	---	<i>in.</i>		
⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C					
Temperature resistance ⁽²⁾					
	min.	-10 °C	14	°F	
	max	60 °C	140	°F	
⁽²⁾ Use with limit values may reduce its life					
Roll/bar sizes	150.0 m	492.0	<i>ft</i>		
COMPLIANCES					
REACH EC 1907/2006 Regulation and Amendments FDA (Food and Drug Administration)					
METHOD OF APPLICATION					
<ul style="list-style-type: none"> - Hot air welding - High frequency welding 					
NOTES					

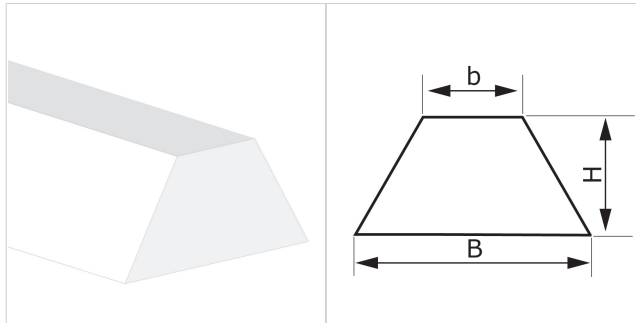

Issue: 22-01-2020

Last Update: 22-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.