


CODE	ES39		TYPE	KN30 P	
DESCRIPTION					
Knotched profile can be used on smaller roller diameters.					
TECHNICAL SPECIFICATIONS					
Material	Polyvinyl chloride (PVC)				
Hardness	60 ±5 Sh.A				
Colour	Green				
Base	Flat				
B Upper base	30.0 mm	1.18	<i>in.</i>		
b Bottom base	16.0 mm	0.63	<i>in.</i>		
H Height	15.0 mm	0.59	<i>in.</i>		
Weight	450 gr/m	0.400	<i>oz/in.</i>		
Minimum pitch					
■ longitudinal	60 mm	2.4	<i>in.</i>		
■ transversal	60 mm	2.4	<i>in.</i>		
Minimum pulley diameters ⁽¹⁾					
■ longitudinal-driving side	180 mm	7.1	<i>in.</i>		
■ longitudinal-conveying side	210 mm	8.3	<i>in.</i>		
■ transversal-conveying side	---	---	<i>in.</i>		
⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C					
Temperature resistance ⁽²⁾					
	min.	-10 °C	14	°F	
	max	60 °C	140	°F	
⁽²⁾ Use with limit values may reduce its life					
Roll/bar sizes	50.0 m	164.0	<i>ft</i>		
COMPLIANCES					
REACH EC 1907/2006 Regulation and Amendments					
METHOD OF APPLICATION					
<ul style="list-style-type: none"> - Hot air welding - High frequency welding 					
NOTES					

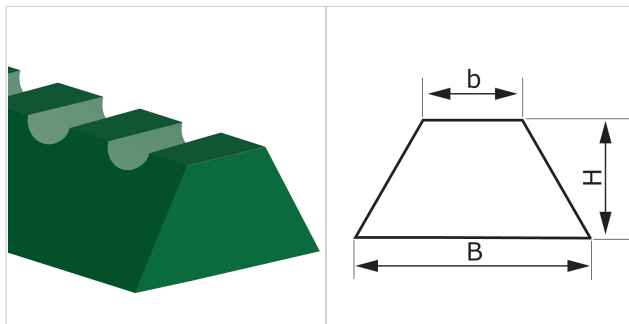

Issue: 22-01-2020

Last Update: 22-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.