

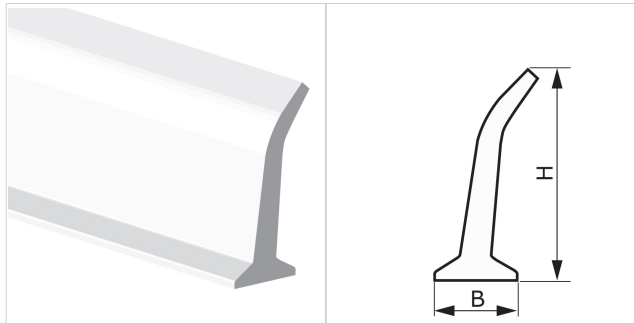


| CODE | ES551 | | TYPE | L50 U HP W | |
|--|---------------------------------|--------|--------|------------|--|
| DESCRIPTION | | | | | |
| PU HP® inclined lateral profile. | | | | | |
|  PRODUCT SYSTEM | | | | | |
| TECHNICAL SPECIFICATIONS | | | | | |
| Material | Polyurethane (TPU) - HP® system | | | | |
| Hardness | 70 ±5 Sh.A | | | | |
| Colour | White | | | | |
| Base | Flat | | | | |
| B Upper base | 10.0 mm | 0.39 | in. | | |
| b Bottom base | --- | --- | in. | | |
| H Height | 50.0 mm | 1.97 | in. | | |
| Weight | 213 gr/m | 0.189 | oz/in. | | |
| Minimum pitch | | | | | |
| ■ longitudinal | --- | --- | in. | | |
| ■ transversal | 40 mm | 1.6 | in. | | |
| Minimum pulley diameters ⁽¹⁾ | | | | | |
| ■ longitudinal-driving side | --- | --- | in. | | |
| ■ longitudinal-conveying side | --- | --- | in. | | |
| ■ transversal-conveying side | 40 mm | 1.6 | in. | | |
| ⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C | | | | | |
| Temperature resistance ⁽²⁾ | min. | -30 °C | -22 | °F | |
| | max | 70 °C | 158 | °F | |
| ⁽²⁾ Use with limit values may reduce its life | | | | | |
| Roll/bar sizes | 2.4 m | 7.9 | ft | | |
| COMPLIANCES | | | | | |
| REACH EC 1907/2006 Regulation and Amendments EC 1935/2004 Regulation and Amendments EC 2023/2006 Regulation and Amendments EU 10/2011, 2017/752 Regulation and Amendments HACCP (Hazard Analysis and Critical Control Points) FDA (Food and Drug Administration) HALAL (World Halal Authority) | | | | | |
|  | | | | | |
| METHOD OF APPLICATION | | | | | |
| - High frequency welding | | | | | |
| NOTES | | | | | |


DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.