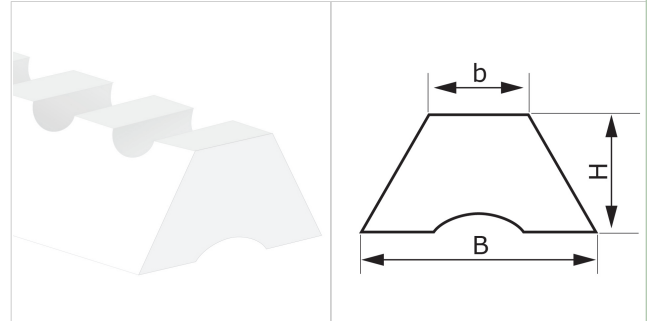


**CODE** ES658

**TYPE**
**KN10 U HP S W**
**DESCRIPTION**

Knotched profile can be used on smaller roller diameters.

PRODUCT SYSTEM 


**TECHNICAL SPECIFICATIONS**

Material Polyurethane (TPU) - HP® system

Hardness 70 ±5 Sh.A

Colour White

Base Grooved

B Upper base 10.0 mm 0.39 in.

b Bottom base 6.0 mm 0.24 in.

H Height 6.0 mm 0.24 in.

Weight 45 gr/m 0.040 oz/in.

Minimum pitch

■ longitudinal 40 mm 1.6 in.

■ transversal 40 mm 1.6 in.

Minimum pulley diameters<sup>(1)</sup>

■ longitudinal-driving side 45 mm 1.8 in.

■ longitudinal-conveying side 75 mm 3.0 in.

■ transversal-conveying side --- mm --- in.

<sup>(1)</sup> Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance <sup>(2)</sup> min. -30 °C -22 °F

max. 70 °C 158 °F

<sup>(2)</sup> Use with limit values may reduce its life

Roll/bar sizes 300.0 m 984.0 ft

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments

EC 1935/2004 Regulation and Amendments

EC 2023/2006 Regulation and Amendments

EU 10/2011, 2017/752 Regulation and Amendments

HACCP (Hazard Analysis and Critical Control Points)

FDA (Food and Drug Administration)

NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments


**METHOD OF APPLICATION**

- Hot air welding
- High frequency welding

**NOTES**

Issue: 22-01-2020

Last Update: 31-08-2020

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.