

**POLYURETHANE ROUND BELTS**

**TECHNICAL DATA SHEET**

**CODE ES792 TYPE RU-8 blue DET**

**COMPOSITION**

Material	Thermoplastic polyurethane (TPU)
Hardness	85 ±5 Sh.A
Colour	Dark blue
Surface	Smooth
Coefficient of friction on steel	0.4


**TECHNICAL SPECIFICATIONS**

Diameter	8.0 mm	0.31 in.
Weight	62.0 gr/m	0.04 lbs./ft.
Minimum pulley diameter	70.0 mm	2.76 in.
Pull for 8% elongation	130.0 N	29.2 lbf.
Temperature resistance (1)	min. -20 °C max 60 °C	-4 °F 140 °F
Humidity influence	no	
Permanent antistatic dynamically UNI EN ISO 21179	no	

(1) Use of the belt with limit values may reduce its life

**JOINTING SYSTEM**

Being thermoweldable polyurethane it enables quick endless jointing of belts. For high precision joints of round belts of any size CHIORINO supply the **FAST JOINT welder "S15"**.

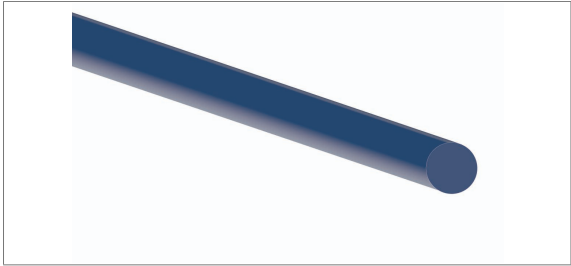

**FEATURES**

- Excellent resistance to hidrolisis
- Extremely good tensile strengths
- Elasticity
- Flexibility values

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2017/752 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)  
 NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments  
 HALAL (World Halal Authority)



**SUITABLE FOR**

Packaging  
 Food: slicing machines  
 Food: bakery

**NOTES**

Belts which are used in various markets for transmission of light duty drives, at medium low speeds and conveying light loads.

Issue: 11-04-2017 Last Update: 9-01-2019

**DISCLAIMER**  
 The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.