


PROFILES and GUIDES

TECHNICAL DATA SHEET

ES81 L70 RF CODE **TYPE**

DESCRIPTION

PVC inclined lateral profile, flat base without groove.

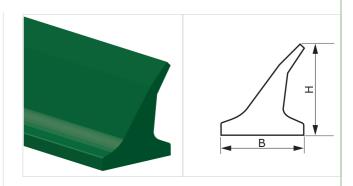

TECHNICAL SPECIFICATIONS

		Polyvir	ıyl ch	loride (F	VC)
				60 ±5	Sh.A
				G	reen
					Flat
pase		20.0	mm	0.79	in.
base			mm		in.
		70.0	mm	2.76	in.
		653	gr/m	0.581	oz/in
pitch					
dinal			mm		in.
rsal		50	mm	2.0	in.
pulley diameters ⁽¹)				
longitudinal-driving side			mm		in
longitudinal-conveying side			mm		in
■ transversal-conveying side		80	mm	3.2	in
ulley diameters referred to e	environm	ent condition	ons of 2	0°C	
ure	min.	-10	°C	14	۰F
e ⁽²⁾	max	60	°C	140	۰F
nit values may reduce its life	Э				
izes		2.4	m	7.9	ft

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

METHOD OF APPLICATION

- High frequency welding

NOTES

Last Update: 22-01-2020 Issue: 22-01-2020

DISCLAIMER
The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.