

SEAMLESS BELTS

TECHNICAL DATA SHEET

CODE **MN-360**

TYPE

MF L-300

BELT STRUCTURE

Outer cover

| | |
|-------------------------|------------------------------|
| Material | Natural elastomer |
| Cover finish | Ground surface |
| Colour | Raspberry |
| Hardness | 35 \pm 5 Sh.A |
| Coefficient of friction | - Paper 2.2 - Plastic 2.4 |

Traction core

| | |
|----------|-----------------|
| Material | Polyester (PET) |
|----------|-----------------|

Inner cover

| | |
|----------|------------------------|
| Material | Polyester (PET) fabric |
| Colour | Black |
| Hardness | --- \pm 5 Sh.A |

TECHNICAL SPECIFICATIONS

| | |
|---|--------------------|
| Available range of standard thicknesses (1) | from 6.0 to 8.0 mm |
| | " 0.2 " 0.3 in |

(1) Please contact CHIORINO S.p.A. for special requirements.

| | |
|----------------|----------------------|
| Diameter sizes | As per mandrels list |
|----------------|----------------------|

| | | |
|---------------|---------|-----------|
| Elongation 1% | 10 N/mm | 57 lbs/in |
|---------------|---------|-----------|

| | |
|---|-----|
| Permanent antistatic dynamically (UNI EN 21179) | yes |
|---|-----|


| | |
|-----------------|----------------------------------|
| Pulley diameter | According to the total thickness |
|-----------------|----------------------------------|

| | | |
|----------------------------|-------------|--------|
| Temperature resistance (2) | min. -20 °C | -4 °F |
| | max +70 °C | 158 °F |

(2) Use of a mandrel made belt with limit values may reduce its life.

SUITABLE FOR

Box folding industry: feeding

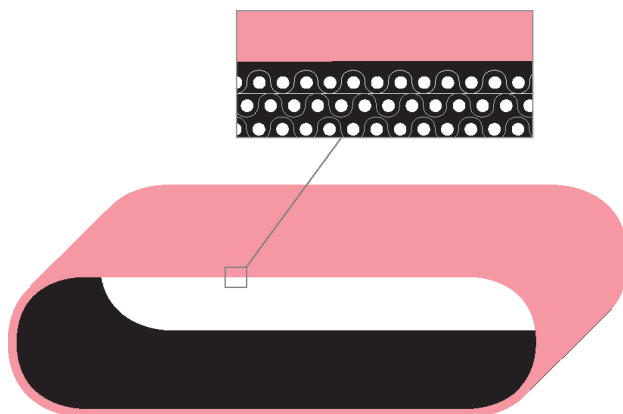

FEATURES

- Resistance to abrasion
- Coefficient of friction stable in time

CHEMICAL RESISTANCES

Class: 8 (See chart of chemical resistances)

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

NOTES

Suitable for smooth cardboard, either glossy or matt.

No joint: manufactured with endless technology which guarantees endless uniformity of the surface and of the coefficient of friction

Issue: 11-11-2008

Last Update: 28-10-2013

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.