

**SEAMLESS BELTS**
**TECHNICAL DATA SHEET**
**CODE** MN373

**TYPE**
**MF B-300**
**BELT STRUCTURE**
**Outer cover**

Material Natural elastomer

Cover finish Ground surface

Colour Beige

 Hardness 50  $\pm$ 5 Sh.A

Coefficient of friction - Paper 1.8

- Plastic 1.9

**Traction core**

Material Polyester (PET)

**Inner cover**

Material Polyester (PET) fabric

Colour Black

 Hardness ---  $\pm$ 5 Sh.A

**TECHNICAL SPECIFICATIONS**

 Available range of standard thicknesses (1) from 10.1 to 12.0 mm  
 " 0.4 " 0.5 in

(1) Please contact CHIORINO S.p.A. for special requirements.

Diameter sizes As per mandrels list

Elongation 1% 10 N/mm 57 lbs/in

Permanent antistatic dynamically (UNI EN 21179) yes

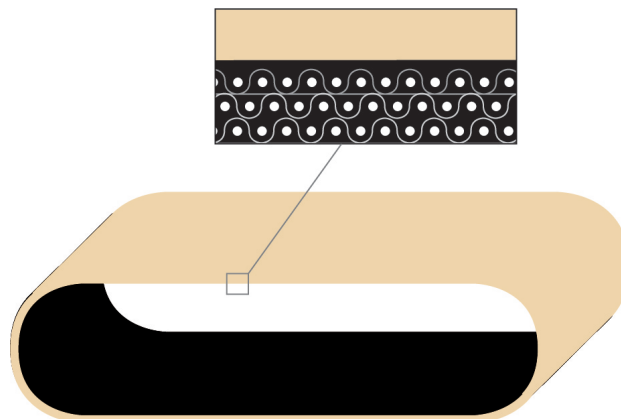
Pulley diameter According to the total thickness

 Temperature resistance (2) min. -20°C -4 °F  
 max +100°C 212 °F

(2) Use of a mandrel made belt with limit values may reduce its life.

**SUITABLE FOR**

Vertical form fill sealers


**FEATURES**

- Resistance to abrasion
- Coefficient of friction stable in time

**CHEMICAL RESISTANCES**

 Class: 8 [link](#)
**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments

**NOTES**

Suitable for abrasive packagings (paper, fabric).

No joint: manufactured with endless technology which guarantees endless uniformity of the surface and the coefficient of friction.

Issue: 11-11-2008

Last Update: 28-10-2013

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.