

# 1M5 U0-U2 HP blue S A

**COMPOSITION**

Conveying surface	Material	Polyurethane (TPU) - HP® system	
	Thickness	0.20 mm	0.008 in.
	Surface pattern	Smooth	
	Colour	HP® blue	
	Coefficient of friction	HF	
Textile carcass	Material	Polyester (PET) - HP® system	
	Plies no.	1	
	Weft type	Rigid	
Driving surface	Material	Fabric polyurethane (TPU) impregn. - HP® system	
	Thickness	---	mm --- in.
	Surface pattern	Fabric	
	Colour	Light blue	

**TECHNICAL SPECIFICATIONS**

Total thickness		0.70 mm	0.03 in.
Weight		0.70 kg/m²	0.14 lbs./sq.ft
Elongation at 1%		5 N/mm	29.0 lbs./in.
Max. admissible pull		5 N/mm	28.6 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-30 °C	-22 °F
	max.	110 °C	230 °F

<sup>(1)</sup> Use of the belt with limit values may reduce its life.

Minimum radius / diameter <sup>(2)</sup>

■ Knife edge minimum radius	3 mm	0.12 in.
■ Bending roller min. diameter	6 mm	0.24 in.
■ Counter-bending roller min. diameter	16 mm	0.63 in.

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.

Coefficient of friction on driving surface

■ Raw steel sheet	0.20 [-]
■ Laminated plastic/wood	0.25 [-]
■ Steel roller	0.20 [-]
■ Rubberized roller	0.30 [-]

Max. production width	2100 mm	83 in.
-----------------------	---------	--------

**SUITABLE FOR**

Food: slicing machines  
Food: dairy  
Food: bread  
Food: sweet and salty snacks  
Food: chocolate bars  
Food: conveying of dried pasta  
Food: pizza


**PRODUCT SYSTEM**

**FEATURES**

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	12

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments  
EC 1935/2004 Regulation and Amendments  
EC 2023/2006 Regulation and Amendments  
EU 10/2011, 2023/1442 Regulation and Amendments  
HACCP (Hazard Analysis and Critical Control Points)  
FDA (Food and Drug Administration)  
NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments  
HALAL (World Halal Authority)


**NOTES**

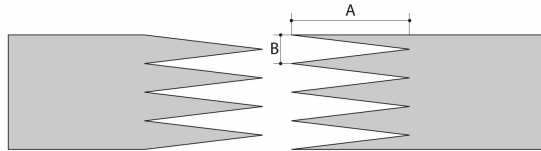
PRODUCT CODE NA1052

Last Update: 10-01-2019

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

# 1M5 U0-U2 HP blue S A

**Recommended joining procedure**
**SINGLE Z - 80 x 10 mm**


A = 80 mm  
B = 10 mm

**Other joining methods can be used:**

DIAGONAL SINGLE Z


MICRO Z - 30 x 6 mm

Check our general catalogue to get further info on CHIORINO joining methods.

**• Pressing**
**Heating press P \ PL \ PLS**

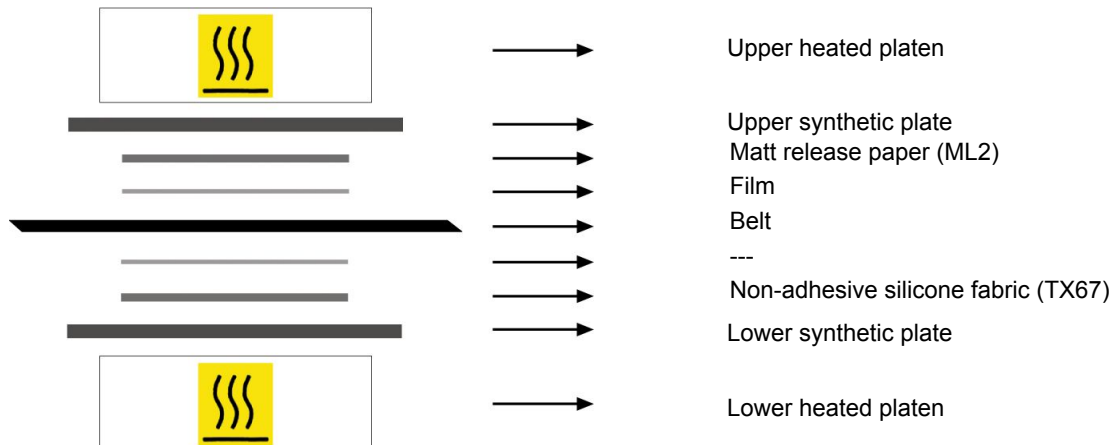
Press settings	
Upper platen temperature	140 °C
Lower platen temperature	140 °C
Temperature gauge setting	140 °C
Curing time in press	3 min.
Pressure	3 bar
Film	TC553 - Film PU HP blue S
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

**• Layout of components**

**• Notes**

PRODUCT CODE NA1052

Last Update: 10-01-2019

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.