

CODE NA1269
TYPE
ME 30/20 blue DET
TECHNICAL SPECIFICATIONS

| | | |
|------------------------------|-------------------------|-----------------|
| Mesh material | PET monofilament | |
| Guides and profiles material | DET® Polyurethane (TPU) | |
| Colour | Blue | |
| Mesh opening | 3000 µm | 56.3 % |
| Mesh thickness | 2.00 mm | 0.08 in. |
| Mesh weight | 0.60 kg/m ² | 0.12 lbs./sq.ft |

Minimum diameter ⁽¹⁾

| | | |
|--------------------------|-------|----------|
| ■ Bending roller | 80 mm | 3.15 in. |
| ■ Counter-bending roller | 80 mm | 3.15 in. |

⁽¹⁾ The above mentioned values depend on the type of Chiorino joint recommended.

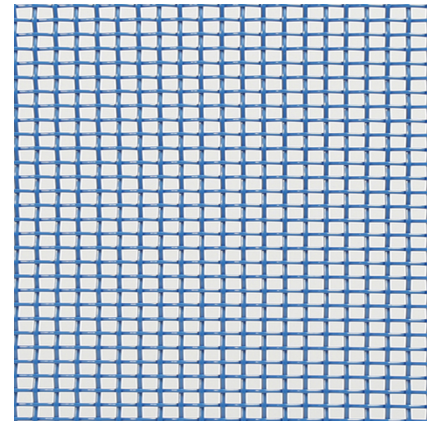
| | | |
|---------------------------------------|-------------|--------|
| Temperature resistance ⁽²⁾ | min. -15 °C | 5 °F |
| | max. 70 °C | 158 °F |

⁽²⁾ Use of the belt with limit values may reduce its life.

| | | |
|-----------------------|---------|---------|
| Edge standard width | 40 mm | 2 in. |
| Max. production width | 5000 mm | 197 in. |

SUITABLE FOR

Fruits and vegetables
Food: dairy

NOTES

FEATURES

| | |
|---|-----|
| Humidity influence | no |
| Suitable to metal detector | no |
| Permanent antistatic dynamically (UNI EN ISO 21179) | no |
| Static conductivity (UNI EN ISO 284) | no |
| Conveying on skid bed | yes |
| Conveying on rollers | yes |
| Conveying on skid bed on top and return | yes |
| Troughed conveying | no |
| Swan neck conveying | no |
| Inclined conveying | no |
| Accumulators belts | yes |
| Curved conveyor | no |
| Chemical resistances link | 12 |

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
 EC 1935/2004 Regulation and Amendments
 EC 2023/2006 Regulation and Amendments
 EU 10/2011, 2023/1442 Regulation and Amendments
 FDA (Food and Drug Administration)



Issue: 10-09-2020

Last Update: 10-09-2020

DISCLAIMER

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.