


<b>CODE</b>	<b>NA135</b>	<b>TYPE</b>	<b>N8</b>
-------------	--------------	-------------	-----------

COMPOSITION	
<b>Conveying surface</b>	Material: Fabric with polyurethane (TPU) impregnation
	Thickness: --- mm --- in.
	Surface pattern: Fabric
	Colour: Green
	Coefficient of friction: LF
<b>Textile carcass</b>	Material: Polyamide (PA)
	Plies no.: 3
	Weft type: Flexible
<b>Driving surface</b>	Material: Fabric with polyurethane (TPU) impregnation
	Thickness: --- mm --- in.
	Surface pattern: Fabric
	Colour: Green

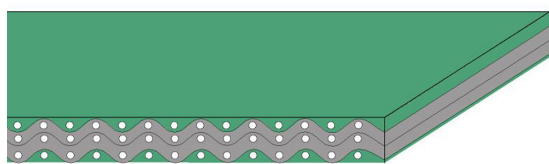

TECHNICAL SPECIFICATIONS			
Total thickness		1.00 mm	0.04 in.
Weight		0.90 kg/m <sup>2</sup>	0.18 lbs./sq.ft
Elongation at 1%		3 N/mm	17.0 lbs./in.
Max. admissible pull		6 N/mm	34.0 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-20 °C	-4 °F
	max.	100 °C	212 °F
<sup>(1)</sup> use of the belt with limit values may reduce its life			
Minimum roller diameter <sup>(2)</sup>			
■ Knife edge		no	
■ Bending roller		15 mm	0.6 in.
■ Counter-bending roller		15 mm	0.6 in.
<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended			
Coefficient of friction on driving surface			
■ Raw steel sheet		0.20 [-]	
■ Laminated plastic/wood		0.25 [-]	
■ Steel roller		0.20 [-]	
■ Rubberized roller		0.30 [-]	
Max. production width		1800 mm	71 in.

FEATURES	
Humidity influence	yes
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	yes
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	yes
Curved conveyor	no
Chemical resistances <a href="#">link</a>	5

SUITABLE FOR
Paper industry: cutters
Printing and graphic: stacking
Printing and graphic: insertion cassettes wind./unwinding
Printing and graphic: gathering
Printing and graphic: wrapping / binding
Packaging

COMPLIANCES
REACH EC 1907/2006 Regulation and Amendments

NOTES

Issue: 24-07-2009

Last Update: 01-03-2019

**DISCLAIMER**  
 The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE NA135

TYPE

**N8**

• Recommended joining procedure SKIVED JOINT '1'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
<b>B600 A</b>	1,1	30	Straight	2-10	---	-10	17,95	90	---	---	---	---
<b>B300 SA</b>	1,1	30	Straight	2-10	43	-10	11-05	(*)	---	---	---	---

• Guide to the use of adhesives

Apply the **K cement** on the polyamide part of the splices.  
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.  
 Press according to the instructions shown.  
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.

• Layout of components

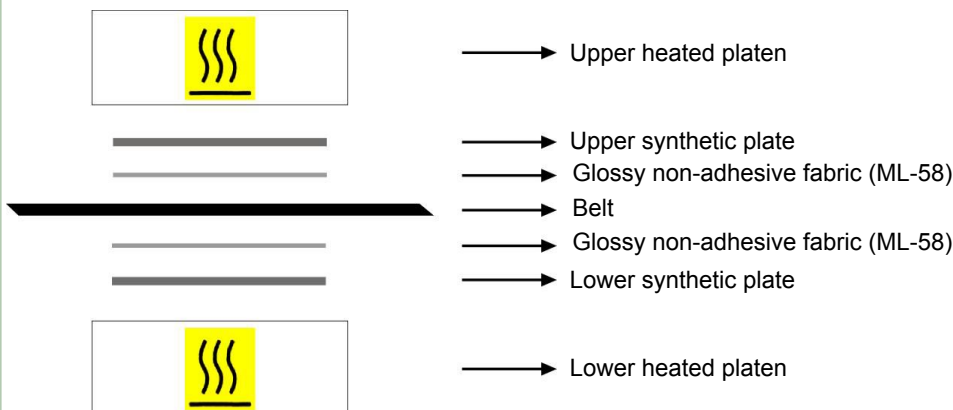

Press settings	
Upper platen temperature	85 °C
Lower platen temperature	85 °C
Curing time in press	5 min.
Driving torque	30
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

(\*) Attention: do not overcome the bloc

Issue: 30-09-2005

Last Update: 30-01-2014

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.