

## CONVEYOR AND PROCESS BELTS

## TECHNICAL DATA SHEET

CODE **NA1460A** TYPE **Compact 25 blue DET**

### COMPOSITION

Conveying surface	Material	Polyurethane (TPU)	
	Thickness	2.50 mm	0.098 in.
	Surface pattern	Smooth	
	Colour	Dark blue	
	Coefficient of friction	LF	
Textile carcass	Material	---	
	Plies no.	---	
	Weft type	---	
Driving surface	Material	Polyurethane (TPU)	
	Thickness	--- mm	--- in.
	Surface pattern	Smooth	
	Colour	Dark blue	

### TECHNICAL SPECIFICATIONS

Total thickness	2.50 mm	0.10 in.
Weight	2.90 kg/m <sup>2</sup>	0.59 lbs./sq.ft
Elongation at 1%	8 N/mm	46.0 lbs./in.
Max. admissible pull	8 N/mm	46.0 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-30 °C -22 °F
	max.	100 °C 212 °F

<sup>(1)</sup> Use of the belt with limit values may reduce its life.

Minimum radius / diameter <sup>(2)</sup>		
■ Knife edge minimum radius	mm	in.
■ Bending roller min. diameter	50 mm	1.97 in.
■ Counter-bending roller min. diameter	80 mm	3.15 in.

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.

Coefficient of friction on driving surface

- Raw steel sheet
- Laminated plastic/wood
- Steel roller
- Rubberized roller

Max. production width 2000 mm 79 in.

### SUITABLE FOR

- Food: meat and fish processing
- Food: seafood processing
- Food: cheese processing
- Fruits and vegetables
- Food: bakery
- Food: sweet and salty snacks



**DET** COMPACT

### FEATURES

Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	no
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	yes
Troughed conveying	no
Swan neck conveying	yes
Inclined conveying	no
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	12

### COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)  
 NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments



### NOTES

Issue: 28-11-2018

Last Update: 13-07-2021

### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA1460A** TYPE **Compact 25 DET**

Recommended joining procedure **SINGLE Z - 80 x 10 mm**



Other joining methods can be used:

- DIAGONAL SINGLE Z
- MICRO Z - 30 x 6 mm
- 
- 

Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing

Heating press **P \ PL \ PLS**


Press settings	
Upper platen temperature	165 °C
Lower platen temperature	165 °C
Temperature gauge setting	165 °C
Curing time in press	3 min.
Pressure	2,5 bar
Film	TC636 - Film PU Blue DET
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.
3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

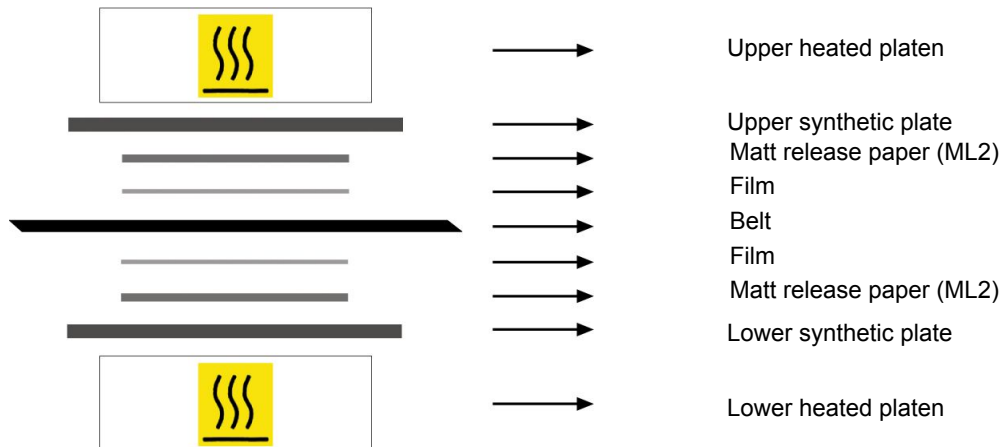

• Notes

Insert a small matress of TX-104 SI0/S Texgum roller covering between the up flattening plate and the ML-2 matt silicone paper.

Issued: 25-02-2019

Last Update: 25-02-2019

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.