

## Compact 25 PN blue DET

### COMPOSITION

Conveying surface	Material	Polyurethane (TPU)	
	Thickness	2.50 mm	0.098 in.
	Surface pattern	PN	
	Colour	Dark blue	
	Coefficient of friction	MF	
Textile carcass	Material	---	
	Plies no.	---	
	Weft type	---	
Driving surface	Material		
	Thickness	mm	0.000 in.
	Surface pattern	Smooth	
	Colour	Dark blue	

### TECHNICAL SPECIFICATIONS

Total thickness	2.50 mm	0.10 in.
Weight	2.90 kg/m <sup>2</sup>	0.59 lbs./sq.ft
Elongation at 1%	8 N/mm	46.0 lbs./in.
Max. admissible pull	8 N/mm	46.0 lbs./in.
Temperature resistance <sup>(1)</sup>	min. -30 °C	-22 °F
	max. 100 °C	212 °F

<sup>(1)</sup> Use of the belt with limit values may reduce its life.

Minimum radius / diameter <sup>(2)</sup>

- Knife edge minimum radius no
- Bending roller min. diameter 50 mm 1.97 in.
- Counter-bending roller min. diameter 80 mm 3.15 in.

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.


Coefficient of friction on driving surface

- Raw steel sheet
- Laminated plastic/wood
- Steel roller
- Rubberized roller

Max. production width	2000 mm	79 in.
-----------------------	---------	--------

### SUITABLE FOR

- Food: meat and fish processing
- Food: conveying of meat
- Food: cheese processing
- Fruits and vegetables
- Food: bakery
- Food: sweet and salty snacks

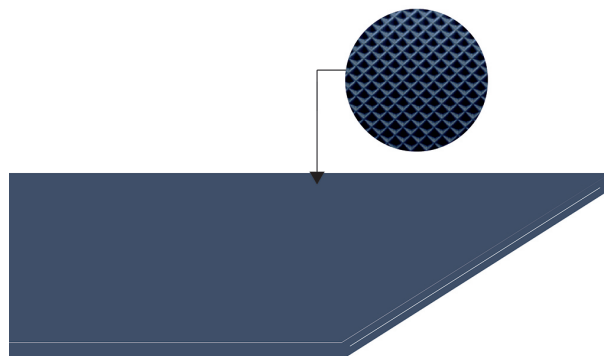

**DET** COMPACT<sup>®</sup>

### FEATURES

Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	no
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	no
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	yes
Inclined conveying	no
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	12

### COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)



### NOTES

PRODUCT CODE NA1561A

Last Update: 03-03-2020

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

## Compact 25 PN blue DET

### Recommended joining procedure

SINGLE Z - 80 x 10 mm



A = 80 mm  
B = 10 mm

Other joining methods can be used:

DIAGONAL SINGLE Z  
DOUBLE Z  
SKIVED JOINT '1'  
---

Check our general catalogue to get further info on CHIORINO joining methods.

### • Pressing

Heating press P \ PL \ PLS

Press settings	
Upper platen temperature	165 °C
Lower platen temperature	160 °C
Temperature gauge setting	160 °C
Curing time in press	3 min.
Pressure	2,5 bar
Film	TC636 - Film PU Blue DET
Cement	---


1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

### • Layout of components

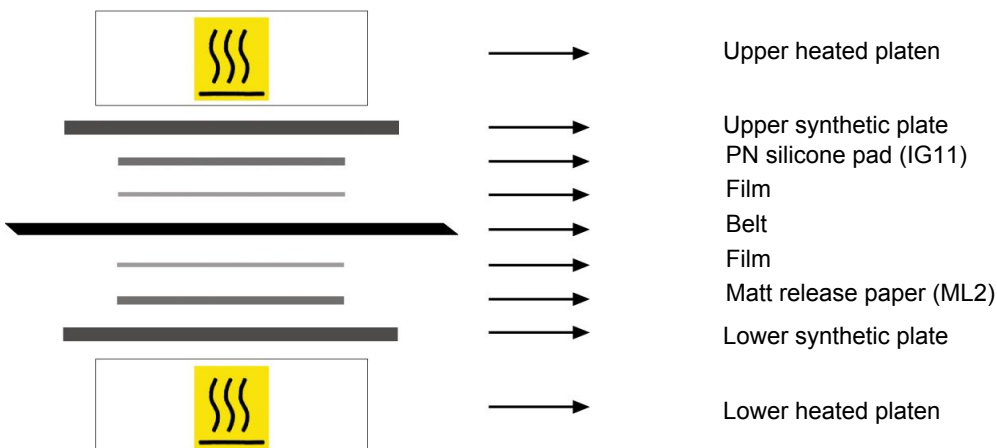

### • Notes

- Interpose a Texgum roller covering type SI0/S (TX-104) between the RG silicon pad (IG-33) and the upper synthetic plate.
- Interpose a small mattress of SILON 25 HC (NA-225) between the matt release paper (ML-2) and the lower synthetic plate.

PRODUCT CODE NA1561A

Last Update: 04-03-2020

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.