



CONVEYOR AND PROCESS BELTS


TECHNICAL DATA SHEET

CODE		NA1565		TYPE		2M5 U0-U0 blue DET	
COMPOSITION							
Conveying surface	Material	Fabric with polyurethane (TPU) impregnation					
	Thickness	---	mm	---	in.		
	Surface pattern	Fabric					
	Colour	Dark blue					
	Coefficient of friction	LF					
Textile carcass	Material	Polyester (PET)					
	Plies no.	2					
	Weft type	Rigid					
Driving surface	Material	Fabric with polyurethane (TPU) impregnation					
	Thickness	---	mm	---	in.		
	Surface pattern	Fabric					
	Colour	Light blue					
TECHNICAL SPECIFICATIONS							
Total thickness		1.00 mm		0.04 in.			
Weight		1.10 kg/m²		0.22 lbs./sq.ft			
Elongation at 1%		5 N/mm		29.0 lbs./in.			
Max. admissible pull		10 N/mm		57.0 lbs./in.			
Temperature resistance ⁽¹⁾	min.	-30 °C		-22 °F			
	max.	100 °C		212 °F			
⁽¹⁾ Use of the belt with limit values may reduce its life.							
Minimum radius / diameter ⁽²⁾							
■ Knife edge minimum radius		4 mm		0,16 in.			
■ Bending roller min. diameter		8 mm		0.31 in.			
■ Counter-bending roller min. diameter		16 mm		0.63 in.			
⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended.							
Coefficient of friction on driving surface							
■ Raw steel sheet		0.20 [-]					
■ Laminated plastic/wood		0.25 [-]					
■ Steel roller		0.20 [-]					
■ Rubberized roller		0.30 [-]					
Max. production width		2000 mm		79 in.			
SUITABLE FOR							
Food: bakery							
Food: conveying of dried pasta							
Food: chocolate bars							
Packaging							
Paper industry							
Wood industry							






FEATURES	
Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	yes
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	yes
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	yes
Curved conveyor	no
Chemical resistances link	12



COMPLIANCES	
REACH EC 1907/2006 Regulation and Amendments	
EC 1935/2004 Regulation and Amendments	
EC 2023/2006 Regulation and Amendments	
EU 10/2011, 2023/1442 Regulation and Amendments	
HACCP (Hazard Analysis and Critical Control Points)	
FDA (Food and Drug Administration)	

NOTES	
-------	--

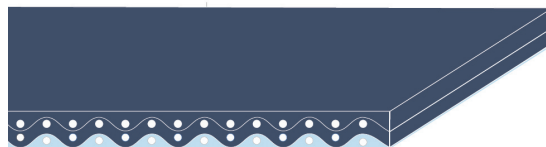



Issue: 22-01-2020

Last Update: 29-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CHIORINO S.p.A. - VIA S. AGATA, 9 - 13900 BIELLA - ITALIA - P.O.B. 460 - TEL. +39-015-8489.1 - FAX +39-015.8489161
chiorino@chiorino.com - www.chiorino.com

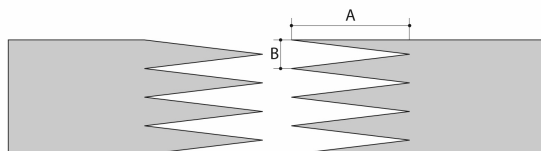CODE NA1565
TYPE
2M5 U0-U0 HP blue DET
Recommended joining procedure
SINGLE Z - 80 x 10 mm

**A = 80 mm
B = 10 mm**
Other joining methods can be used:


DIAGONAL SINGLE Z
DOUBLE Z
SKIVED JOINT '1'
MICRO Z - 30 x 6 mm

Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing
Heating press P \ PL \ PLS


Press settings	
Upper platen temperature	160 °C
Lower platen temperature	160 °C
Temperature gauge setting	160 °C
Curing time in press	3 min.
Pressure	3 bar
Film	TC636 - Film PU Blue DET
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.

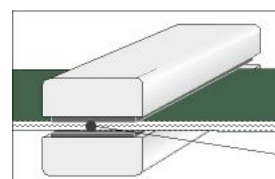

2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

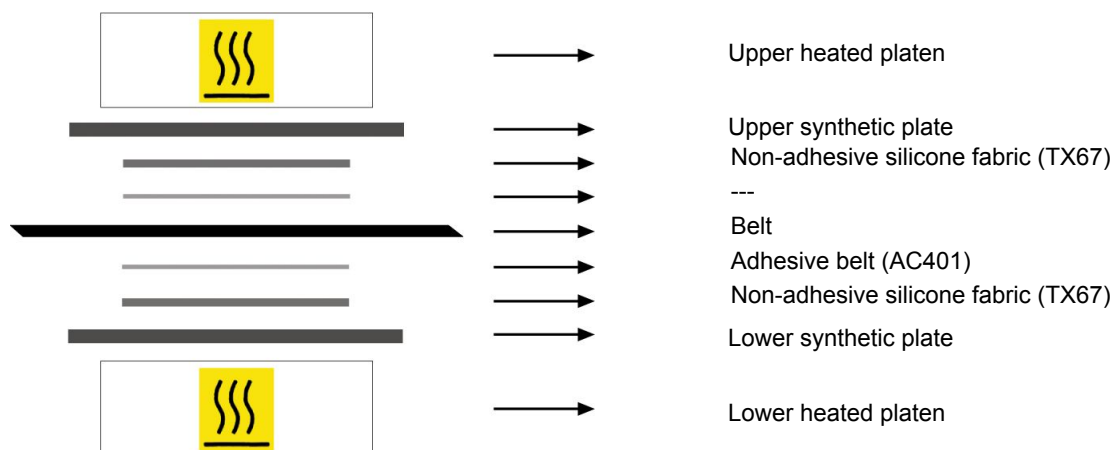• Layout of components

• Notes

Seal the belt using the antistatic thread on the covering surface.

Issued: 11-01-2020

Last Update: 11-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.