


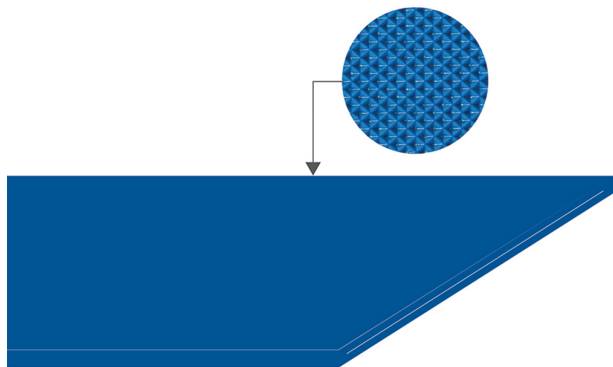

CODE NA1730A		TYPE	HP Compact 25 PN blue AM																																																
COMPOSITION		FEATURES																																																	
		<table><tr><td>Humidity influence</td><td>no</td></tr><tr><td>Suitable to metal detector</td><td>yes</td></tr><tr><td>Permanent antistatic dynamically (UNI EN ISO 21179)</td><td>no</td></tr><tr><td>Static conductivity (UNI EN ISO 284)</td><td>no</td></tr><tr><td>C.I.P. (Clean In Place)</td><td>yes</td></tr><tr><td>Conveying on plastic strips UHMW⁽²⁾</td><td>yes</td></tr><tr><td>Conveying on rollers</td><td>yes</td></tr><tr><td>Troughed conveying</td><td>no</td></tr><tr><td>Swan neck conveying</td><td>yes</td></tr><tr><td>Inclined conveying</td><td>yes</td></tr><tr><td>Accumulators belts</td><td>no</td></tr><tr><td>Curved conveyor</td><td>no</td></tr><tr><td>Chemical resistances link</td><td>12</td></tr></table>			Humidity influence	no	Suitable to metal detector	yes	Permanent antistatic dynamically (UNI EN ISO 21179)	no	Static conductivity (UNI EN ISO 284)	no	C.I.P. (Clean In Place)	yes	Conveying on plastic strips UHMW ⁽²⁾	yes	Conveying on rollers	yes	Troughed conveying	no	Swan neck conveying	yes	Inclined conveying	yes	Accumulators belts	no	Curved conveyor	no	Chemical resistances link	12																					
Humidity influence	no																																																		
Suitable to metal detector	yes																																																		
Permanent antistatic dynamically (UNI EN ISO 21179)	no																																																		
Static conductivity (UNI EN ISO 284)	no																																																		
C.I.P. (Clean In Place)	yes																																																		
Conveying on plastic strips UHMW ⁽²⁾	yes																																																		
Conveying on rollers	yes																																																		
Troughed conveying	no																																																		
Swan neck conveying	yes																																																		
Inclined conveying	yes																																																		
Accumulators belts	no																																																		
Curved conveyor	no																																																		
Chemical resistances link	12																																																		
		COMPLIANCE																																																	
<table><tr><td>Description</td><td colspan="3">Compact belt with traction core treated to avoid waving</td></tr><tr><td>Material</td><td colspan="3">Polyurethane (TPU) - HP[®] system</td></tr><tr><td>Thickness</td><td>2.50 mm</td><td colspan="2">0.10 in.</td></tr><tr><td>Weight</td><td>2.90 kg/m²</td><td colspan="2">0.59 lbs./sq.ft</td></tr><tr><td>Surface pattern</td><td colspan="3">PN</td></tr><tr><td>Colour</td><td colspan="3">HP[®] blue</td></tr><tr><td>Coefficient of friction</td><td colspan="3">HF</td></tr></table>		Description	Compact belt with traction core treated to avoid waving			Material	Polyurethane (TPU) - HP [®] system			Thickness	2.50 mm	0.10 in.		Weight	2.90 kg/m ²	0.59 lbs./sq.ft		Surface pattern	PN			Colour	HP [®] blue			Coefficient of friction	HF			<div>REACH EC 1907/2006 Regulation and Amendments</div> <div>EC 1935/2004 Regulation and Amendments</div> <div>EC 2023/2006 Regulation and Amendments</div> <div>EU 10/2011, 2023/1442 Regulation and Amendments</div> <div>HACCP (Hazard Analysis and Critical Control Points)</div> <div>FDA (Food and Drug Administration)</div> <div></div>																					
Description	Compact belt with traction core treated to avoid waving																																																		
Material	Polyurethane (TPU) - HP [®] system																																																		
Thickness	2.50 mm	0.10 in.																																																	
Weight	2.90 kg/m ²	0.59 lbs./sq.ft																																																	
Surface pattern	PN																																																		
Colour	HP [®] blue																																																		
Coefficient of friction	HF																																																		
TECHNICAL SPECIFICATIONS		SUITABLE FOR																																																	
<table><tr><td>Elongation at 1%</td><td>8 N/mm</td><td colspan="2">46 lbs./in.</td></tr><tr><td rowspan="2">Temperature resistance ⁽¹⁾</td><td>min.</td><td>-30 °C</td><td>-22 °F</td></tr><tr><td>max.</td><td>+110 °C</td><td>230 °F</td></tr><tr><td colspan="4">⁽¹⁾ use of the belt with limit values may reduce its life</td></tr><tr><td>Max. production width</td><td>2000 mm</td><td colspan="2">79 in.</td></tr><tr><td colspan="4">Minimum roller diameter:</td></tr><tr><td>■ Bending roller</td><td>40 mm</td><td colspan="2">1.6 in.</td></tr><tr><td>■ Counter-bending roller</td><td>40 mm</td><td colspan="2">1.6 in.</td></tr><tr><td colspan="4">Coefficient of friction:</td></tr><tr><td>■ Stainless steel - dry/wet</td><td colspan="3">0.50/0.42 [-]</td></tr><tr><td>■ UHMW⁽²⁾ - dry/wet</td><td colspan="3">0.42/0.35 [-]</td></tr><tr><td colspan="4">⁽²⁾UHMW = Ultra High Molecular Weight</td></tr></table>		Elongation at 1%	8 N/mm	46 lbs./in.		Temperature resistance ⁽¹⁾	min.	-30 °C	-22 °F	max.	+110 °C	230 °F	⁽¹⁾ use of the belt with limit values may reduce its life				Max. production width	2000 mm	79 in.		Minimum roller diameter:				■ Bending roller	40 mm	1.6 in.		■ Counter-bending roller	40 mm	1.6 in.		Coefficient of friction:				■ Stainless steel - dry/wet	0.50/0.42 [-]			■ UHMW ⁽²⁾ - dry/wet	0.42/0.35 [-]			⁽²⁾ UHMW = Ultra High Molecular Weight				<div>Food: meat and fish processing</div> <div>Food: seafood processing</div> <div>Food: cheese processing</div> <div>Fruits and vegetables</div> <div>Food: bakery</div> <div>Food: sweet and salty snacks</div>		
Elongation at 1%	8 N/mm	46 lbs./in.																																																	
Temperature resistance ⁽¹⁾	min.	-30 °C	-22 °F																																																
	max.	+110 °C	230 °F																																																
⁽¹⁾ use of the belt with limit values may reduce its life																																																			
Max. production width	2000 mm	79 in.																																																	
Minimum roller diameter:																																																			
■ Bending roller	40 mm	1.6 in.																																																	
■ Counter-bending roller	40 mm	1.6 in.																																																	
Coefficient of friction:																																																			
■ Stainless steel - dry/wet	0.50/0.42 [-]																																																		
■ UHMW ⁽²⁾ - dry/wet	0.42/0.35 [-]																																																		
⁽²⁾ UHMW = Ultra High Molecular Weight																																																			
PRODUCT CODE NA1730A		NOTES																																																	
DISCLAIMER		Last Update: 20-04-2023																																																	
The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.																																																			

COMPLIANCE

REACH EC 1907/2006 Regulation and Amendments
EC 1935/2004 Regulation and Amendments
EC 2023/2006 Regulation and Amendments
EU 10/2011, 2023/1442 Regulation and Amendments
HACCP (Hazard Analysis and Critical Control Points)
FDA (Food and Drug Administration)


SUITABLE FOR

Food: meat and fish processing
Food: seafood processing
Food: cheese processing
Fruits and vegetables
Food: bakery
Food: sweet and salty snacks

NOTES