


## ProDrive S 30 LB

### COMPOSITION

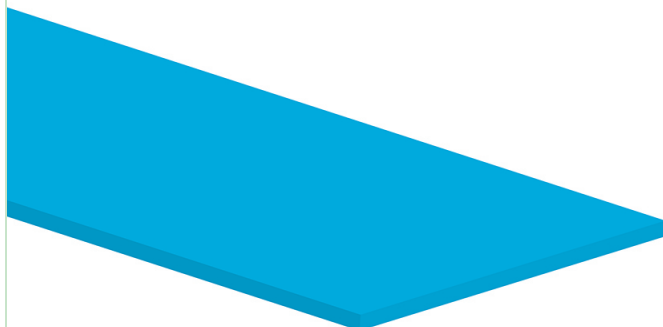


Description	Monolithic belt	
Material	Polyurethane (TPU)	
Thickness	3.00 mm	0.12 in.
Weight	4.80 kg/m²	0.98 lbs./sq.ft
Surface pattern	Matt	
Colour	Light blue	
Coefficient of friction	MF	

### TECHNICAL SPECIFICATIONS

Elongation at 1%	4 N/mm	23 lbs./in.	
Pitch	± 0.4 mm	± 0.16 in.	
Temperature resistance <sup>(2)</sup>	min.	-5 °C	23 °F
	max.	+80 °C	176 °F
<sup>(1)</sup> Use of the belt with limit values may reduce its life			
Max. production width	1200 mm	47 in.	
Minimum roller diameter:			
■ Bending roller	40 mm	1.6 in.	
■ Counter-bending roller	60 mm	2.4 in.	
Coefficient of friction:			
■ Stainless steel - dry/wet	0.50/0.42 [-]		
■ UHMW <sup>(2)</sup> - dry/wet	0.42/0.35 [-]		

<sup>(2)</sup> UHMW = Ultra High Molecular Weight

### FEATURES

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	no
Static conductivity (UNI EN ISO 284)	no
Conveying on plastic strips UHMW <sup>(2)</sup>	yes
Conveying on rollers	yes
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	5

### COMPLIANCE

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 FDA (Food and Drug Administration)



### SUITABLE FOR

Food: meat and fish processing  
 Food: seafood processing  
 Food: cheese processing  
 Food: bakery  
 Food: sweet and salty snacks  
 Fruits and vegetables

### NOTES

PRODUCT CODE NA1823

Last Update: 24-09-2024

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.