

2M20 U0-V25 RT

COMPOSITION

Conveying surface	Material	PVC 65 Sh.A (±5)			
	Thickness	2.50	mm	0.098 in.	
	Surface pattern	RT			
	Colour	Green			
	Coefficient of friction	MF			
Textile carcass	Material	Polyester (PET)			
	Plies no.	2			
	Weft type	Rigid			
Driving surface	Material	Fabric with polyurethane (TPU) impregnation			
	Thickness	---	mm	---	in.
	Surface pattern	LdB fabric			
	Colour	Grey			

TECHNICAL SPECIFICATIONS

Total thickness	5.00 mm	0.20 in.
Weight	5.70 kg/m ²	1.16 lbs./sq.ft
Elongation at 1%	20 N/mm	114.0 lbs./in.
Max. admissible pull	40 N/mm	228.0 lbs./in.
Temperature resistance ⁽¹⁾	min. -10 °C	14 °F
	max. 60 °C	140 °F

⁽¹⁾ Use of the belt with limit values may reduce its life.

Minimum radius / diameter ⁽²⁾

■ Knife edge minimum radius	no
■ Bending roller min. diameter	100 mm 3.94 in.
■ Counter-bending roller min. diameter	150 mm 5.91 in.

⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended.


Coefficient of friction on driving surface

■ Raw steel sheet	0.20 [-]
■ Laminated plastic/wood	0.25 [-]
■ Steel roller	0.20 [-]
■ Rubberized roller	0.30 [-]

Max. production width	2000 mm	79 in.
-----------------------	---------	--------

SUITABLE FOR

Ceramic industry
Marble and granite industry
Steel blankets magnetic elevators

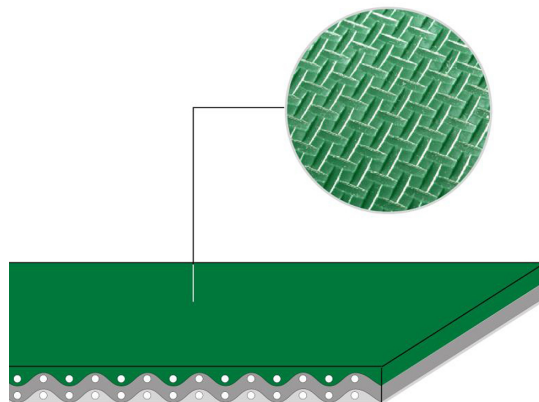

FEATURES

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	no
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances link	3

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
EC 1935/2004 Regulation and Amendments
EC 2023/2006 Regulation and Amendments
EU 10/2011, 2023/1442 Regulation and Amendments
FDA (Food and Drug Administration)



NOTES

PRODUCT CODE NA37

Last Update: 12-12-2018

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

2M20 U0-V25 RT

Recommended joining procedure
SINGLE Z - 80 x 10 mm


A = 80 mm
B = 10 mm

Other joining methods can be used:
STEP

Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing
Heating press P \ PL \ PLS


Press settings	
Upper platen temperature	175 °C
Lower platen temperature	175 °C
Temperature gauge setting	175 °C
Curing time in press	3 min.
Pressure	3 bar
Film	TC29 - Green PVC film
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

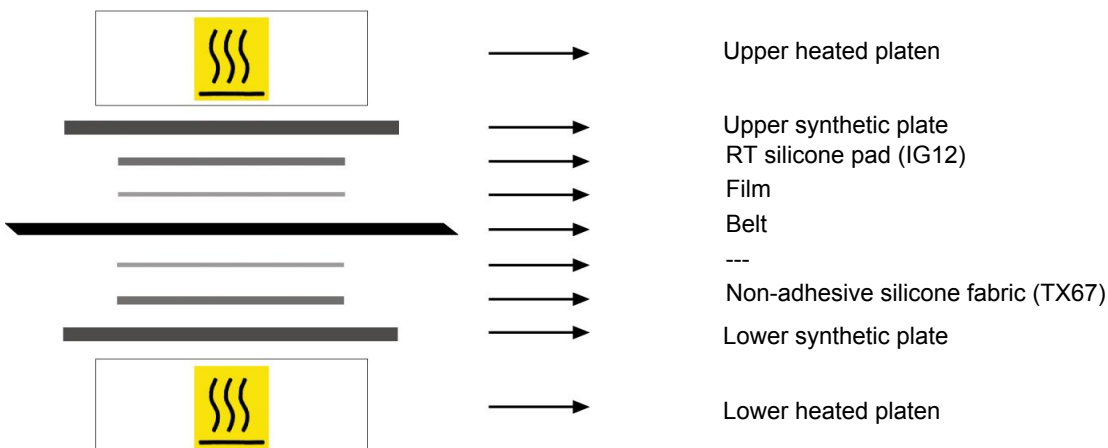• Layout of components

• Notes

After a first pressing to make the belt endless, proceed with a second pressing operation using the RT impression pad with platens temperature 150 centigrades.

PRODUCT CODE NA37
Last Update: 30-01-2014
DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.