

## 2M5 U0-U2 HP W

### COMPOSITION

|                   |                         |   |            |
|-------------------|-------------------------|---|------------|
| Conveying surface | Material                | Polyurethane (TPU) - HP® system                 |            |
|                   | Thickness               | 0.20 mm   | 0.008 in.  |
|                   | Surface pattern         | Smooth  |            |
|                   | Colour                  | White   |            |
|                   | Coefficient of friction | MF  |            |
| Textile carcass   | Material                | Polyester (PET) - HP® system                    |            |
|                   | Plies no.               | 2   |            |
|                   | Weft type               | Rigid   |            |
| Driving surface   | Material                | Fabric polyurethane (TPU) impregn. - HP® system |            |
|                   | Thickness               | ---   | mm --- in. |
|                   | Surface pattern         | Fabric  |            |
|                   | Colour                  | Light blue                                      |            |

### TECHNICAL SPECIFICATIONS

|                                       |                            |                  |
|---------------------------------------|----------------------------|------------------|
| Total thickness                       | 1.30 mm                    | 0.05 in.         |
| Weight                                | 1.40 kg/m <sup>2</sup>     | 0.29 lbs./sq.ft  |
| Elongation at 1%                      | 6 N/mm                     | 34.0 lbs./in.    |
| Max. admissible pull                  | 12 N/mm                    | 68.5 lbs./in.    |
| Temperature resistance <sup>(1)</sup> | min. -30 °C<br>max. 110 °C | -22 °F<br>230 °F |

<sup>(1)</sup> Use of the belt with limit values may reduce its life.

Minimum radius / diameter <sup>(2)</sup>

|  |       |          |
|--|-------|----------|
| ■ Knife edge minimum radius            | 4 mm  | 0.16 in. |
| ■ Bending roller min. diameter         | 8 mm  | 0.31 in. |
| ■ Counter-bending roller min. diameter | 16 mm | 0.63 in. |

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.

Coefficient of friction on driving surface

|                          |          |
|--------------------------|----------|
| ■ Raw steel sheet        | 0.20 [-] |
| ■ Laminated plastic/wood | 0.25 [-] |
| ■ Steel roller           | 0.20 [-] |
| ■ Rubberized roller      | 0.30 [-] |

|                       |         |        |
|-----------------------|---------|--------|
| Max. production width | 2100 mm | 83 in. |
|-----------------------|---------|--------|

### SUITABLE FOR

Food: slicing machines  
 Food: seafood processing  
 Food: dairy  
 Food: bakery  
 Food: biscuits and crackers: rotary cutter  
 Food: chocolate bars  
 Paper industry: tissue  
 Packaging  
 Pharmaceuticals industry



### PRODUCT SYSTEM



### FEATURES

|   |     |
|---|-----|
| Humidity influence                                  | no  |
| Suitable to metal detector                          | yes |
| Permanent antistatic dynamically (UNI EN ISO 21179) | no  |
| Static conductivity (UNI EN ISO 284)                | no  |
| Conveying on skid bed                               | yes |
| Conveying on rollers                                | yes |
| Conveying on skid bed on top and return             | no  |
| Troughed conveying                                  | no  |
| Swan neck conveying                                 | no  |
| Inclined conveying                                  | yes |
| Accumulators belts                                  | no  |
| Curved conveyor                                     | no  |
| Chemical resistances <a href="#">link</a>           | 12  |

### COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)  
 USDA Meat&Poultry (United States Department of Agriculture)  
 NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments  
 HALAL (World Halal Authority)  
 VEGAN



### NOTES

PRODUCT CODE **NA567**

Last Update: 02-10-2023

### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

### 2M5 U0-U2 HP W

#### Recommended joining procedure

SINGLE Z - 80 x 10 mm



A = 80 mm  
B = 10 mm

Other joining methods can be used:

DIAGONAL SINGLE Z  
DOUBLE Z  
SKIVED JOINT '1'

---


Check our general catalogue to get further info on CHIORINO joining methods.

#### • Pressing

Heating press P \ PL \ PLS

| Press settings            |                      |
|---------------------------|----------------------|
| Upper platen temperature  | 155 °C               |
| Lower platen temperature  | 155 °C               |
| Temperature gauge setting | 155 °C               |
| Curing time in press      | 3 min.               |
| Pressure                  | 2 bar                |
| Film                      | TC300 - HP W PU film |
| Cement                    | ---                  |


1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.

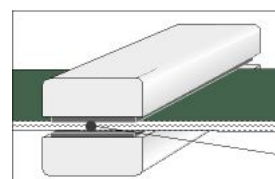

2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

#### • Layout of components

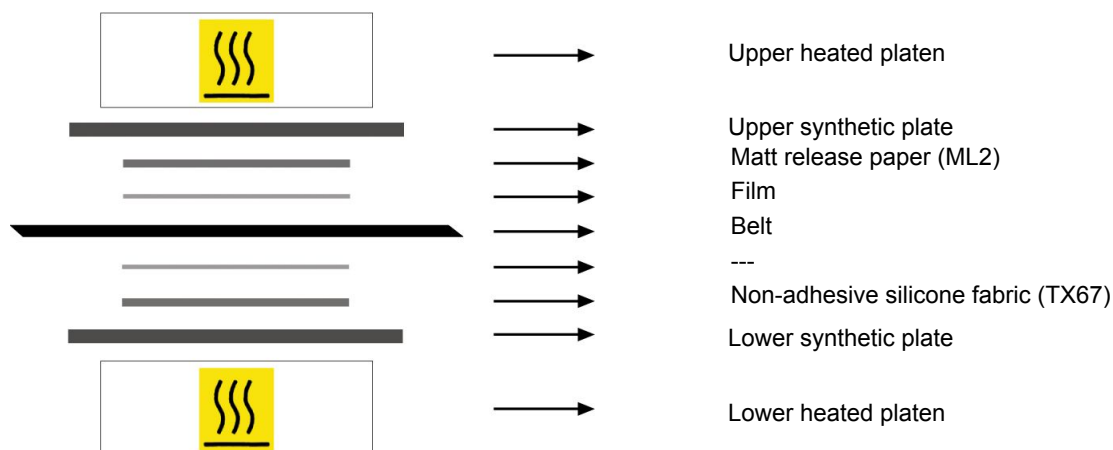

#### • Notes

PRODUCT CODE NA567

Last Update: 10-01-2019

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.