

2M8 U0-U-G10TP LG

COMPOSITION

Conveying surface	Material	Thermoplastic elastomer			
	Thickness	0.70	mm	0.028 in.	
	Surface pattern	LG			
	Colour	Green			
	Coefficient of friction	HF			
Textile carcass	Material	Polyester (PET)			
	Plies no.	2			
	Weft type	Rigid			
Driving surface	Material	Fabric with polyurethane (TPU) impregnation			
	Thickness	---	mm	---	in.
	Surface pattern	Fabric			
	Colour	Black			

TECHNICAL SPECIFICATIONS

Total thickness	2.80 mm	0.11 in.
Weight	2.70 kg/m ²	0.55 lbs./sq.ft
Elongation at 1%	8 N/mm	46.0 lbs./in.
Max. admissible pull	16 N/mm	91.4 lbs./in.
Temperature resistance ⁽¹⁾	min. -20 °C max. 100 °C	-4 °F 212 °F

⁽¹⁾ Use of the belt with limit values may reduce its life.

Minimum radius / diameter ⁽²⁾

- Knife edge minimum radius no
- Bending roller min. diameter 30 mm 1.18 in.
- Counter-bending roller min. diameter 60 mm 2.36 in.

⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended.


Coefficient of friction on driving surface

- Raw steel sheet 0.20 [-]
- Laminated plastic/wood 0.25 [-]
- Steel roller 0.20 [-]
- Rubberized roller 0.30 [-]

Max. production width 2000 mm 79 in.

SUITABLE FOR

Wood industry
Paper industry: discharge
Packaging
Materials handling
Mechanical industry

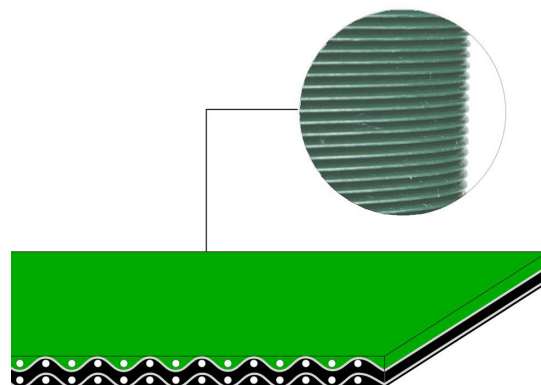

FEATURES

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances link	5

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

NOTES

PRODUCT CODE NA998

Last Update: 01-04-2025

DISCLAIMER


The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

2M8 U0-U-G10TP LG

Recommended joining procedure

SINGLE Z - 80 x 10 mm

Other joining methods can be used:

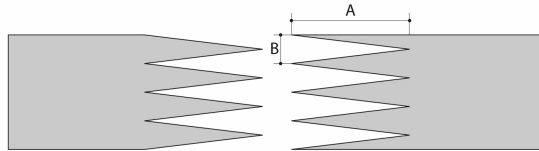

A = 80 mm
B = 10 mm


Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing

Heating press P \ PL \ PLS

Press settings	
Upper platen temperature	165 °C
Lower platen temperature	140 °C
Temperature gauge setting	140 °C
Curing time in press	3 min.
Pressure	3 bar
Film	TC566 - Film PU TP-LG green P5535C
Cement	---


1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

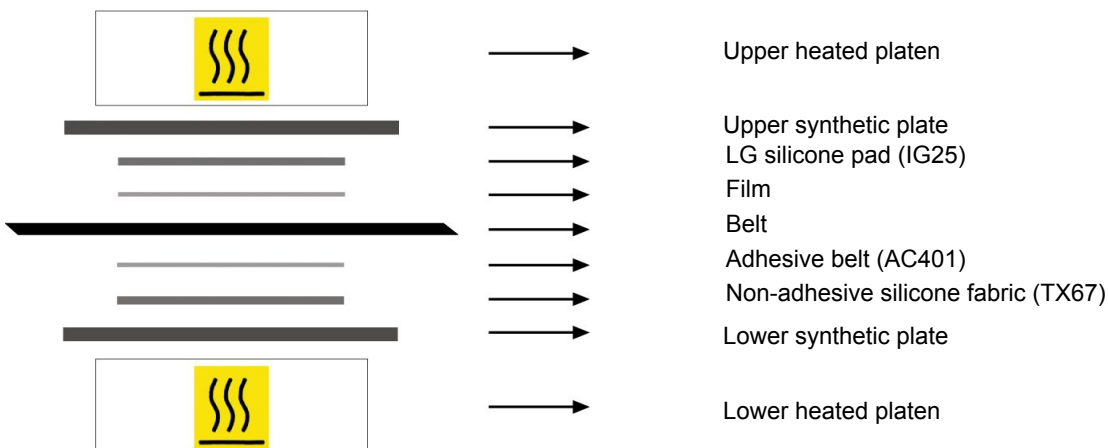

• Notes

Warning! First place the foil on the mylar; when you are sure the foil is positioned correctly, remove the mylar, so that the foil touches the belt.

PRODUCT CODE NA998

Last Update: 23-08-2024

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.