

# "TEXGUM" ROLLER COVERINGS

# **TECHNICAL DATA SHEET**

CODE TX120 TYPE SIO

#### STRUCTURE

# **External covering**

Material Silicone

Surface pattern Smooth

Special execution ---

Colour White

Hardness 50 ±5 Sh.A

#### **Textile carcass**

Material Polyester (PET)

#### TECHNICAL SPECIFICATIONS

| Total thickness            |            | 1.1 mm           | 0.04      | in.        |
|----------------------------|------------|------------------|-----------|------------|
| Weight                     |            | 1.0 kg/m²        | 0.20      | lbs./sq.ft |
| Tensile strength           |            | 70 N/mm          | 400       | lbs./in.   |
| Temperature resistance (1) | min<br>max | -20 °C<br>160 °C | -4<br>320 | °F<br>°F   |

(1) Use of the roller covering with limit values may reduce its life

### **ROLL SIZES**


| Length    | 115 m | 4528 in. |
|-----------|-------|----------|
| Width (2) | 50 mm | 2 in.    |
|           | 70 mm | 3 in.    |

(2) Other widths upon request

#### SUITABLE FOR

Textile: rolling machine

Textile: rameuse (tenter frames)

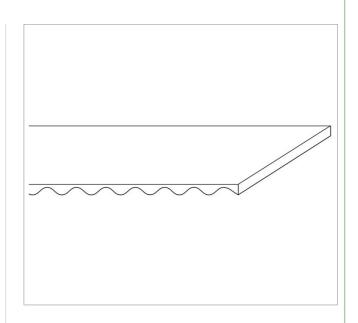

#### ADHESIVES

- To glue the covering to the roller it is recommendable to use the single-component adhesive TEXCOL CHIORINO

#### FEATURES

- Excellent adhesion
- Resistance to oils

#### COMPLIANCES

REACH Regulation EC 1907/2006 and amendments

#### NOTES

Self-adhesive/A version available Antistatic fabric

Issue: 26-09-2006 Last Update: 2-1-2018

#### **DISCLAIMER**

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.