

CODE CG-276
TYPE
DU1/30 W
COMPOSITION
Top surface

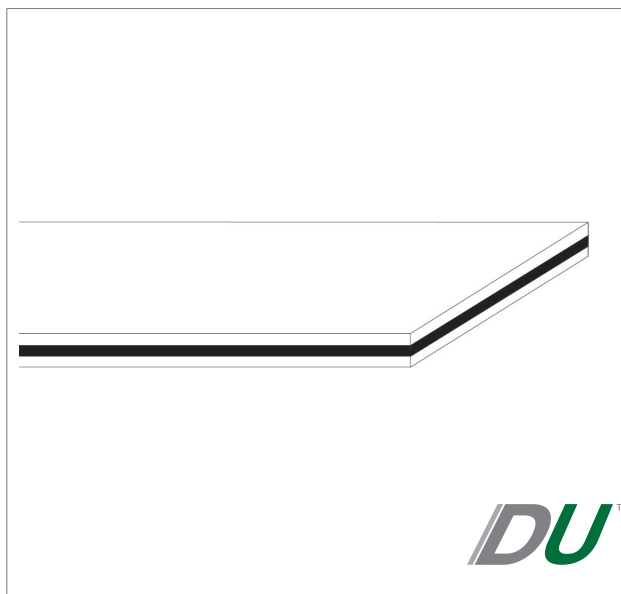
material	Polyurethane (TPU)
finish	FL
colour	White
coefficient of friction	0.7

Traction core

material	Polyamide (PA)
----------	----------------

Bottom surface

material	Polyurethane (TPU)
finish	FL
colour	White
coefficient of friction	0.7


TECHNICAL SPECIFICATIONS

Total thickness	3.0 mm	0.12 in.
Weight	3.0 kg/m ²	0.61 lbs./sq.ft
Minimum pulley diameter (1)	30 mm	1.2 in.
(1) The above mentioned values depend on running speed		
Pull for 1% elongation	5.0 N/mm	29 lbs./in.
Tensile strength	200 N/mm	1142 lbs./in.
Temperature resistance (2)	min.	-20 °C
	max	100 °C
(2) Use of the belt with limit values may reduce its life		
Humidity influence	yes	
Permanent antistatic dynamically (UNI EN ISO 21179)	yes	
Both sides can be used for power transmission	yes	

FEATURES

- Highest resistance to abrasion
- Outstanding flexibility
- Excellent coefficient to friction and performance maintenance over time
- Excellent resilience in the joining
- Excellent creep recovery of all strains to which it undergoes during particularly hard processing cycles

SUITABLE FOR

Box folding industry: folder-glueers
 Paper industry: tube winders
 Corrugated carton: flexo-folding

COMPLIANCES

REACH Regulation EC 1907/2006 and amendments
 Regulation EC 1935/2004 and amendments
 Regulation EC 2023/2006 and amendments
 Regulation EU 10/2011 and amendments
 FDA (Food and Drug Administration)

NOTES

Issue: 07-04-2016

Last Update: 25-05-2016

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE CG-276
TYPE
DU1/30 W
• Recommended joining procedure

SKIVED JOINT '1'



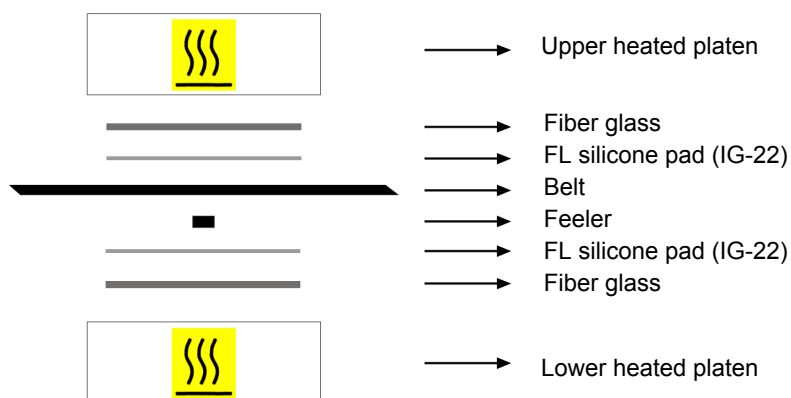
Check our general catalogue to get further info on CHIORINO joining methods.

• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	3	60	Diagonal	5-28	---	---	---	---	---	-10	18,20	---
B300 SA	3	60	Diagonal	5-28	---	---	---	---	---	-10	11-12	---

• Guide to the use of adhesives

Apply the **K adhesive** on the polyamide part of the splices. Let dry for 5 minutes.
 Pour the **I hardener** with the **R adhesive** (pot-life 2 hours).
 Apply the above mix on the elastomer or leather part of the splices.
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.
 Press according to the instructions shown.
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.
 Kit: **GUMMICOL**

• Layout of components

Press settings

Upper platen temperature	120 °C
Lower platen temperature	120 °C
Curing time in press	15 min.
Driving torque	3 bar Nm
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

Check the set temperature by means of a **feeler** ensuring $120 \pm 5^\circ\text{C}$ is reached on the platen that is in contact with the lower side of the belt.

Note: the feeler must be placed on a fill-in piece and not on the product joint (the procedure of checking the temperatures must be carried out and re-checked at least once a week).

Issue: 28-06-2016

Last Update: 24-01-2017

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.