

**CONVEYOR AND PROCESS BELTS**
**TECHNICAL DATA SHEET**
**CODE NA-1137**
**TYPE**
**2T12 U0-G35 HS GP**
**COMPOSITION**

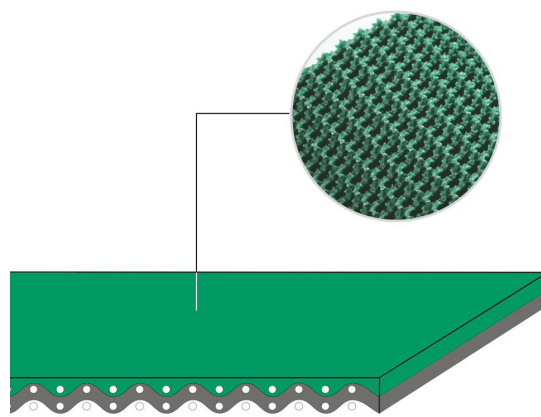
<b>Conveying surface</b>	Material	Synthetic elastomer	
	Thickness	3.50 mm	0.138 in.
	Surface pattern	GP	
	Colour	Green	
	Coefficient of friction	HF	
<b>Textile carcass</b>	Material	Polyester (PET)	
	Plies no.	2	
	Weft type	Flexible	
<b>Driving surface</b>	Material	Fabric with polyurethane (TPU) impregnation	
	Thickness	--- mm	--- in.
	Surface pattern	Fabric	
	Colour	Grey	

**TECHNICAL SPECIFICATIONS**

Total thickness	6.50 mm	0.26 in.
Weight	6.50 kg/m <sup>2</sup>	1.33 lbs./sq.ft
Elongation at 1%	12 N/mm	69.0 lbs./in.
Max. admissible pull	24 N/mm	137.0 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-40 °C -40 °F
	max.	100 °C 212 °F
<sup>(1)</sup> use of the belt with limit values may reduce its life		
Minimum roller diameter <sup>(2)</sup>		
■ Knife edge	no	
■ Bending roller	80 mm	3.2 in.
■ Counter-bending roller	120 mm	4.7 in.
<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended		
Coefficient of friction on driving surface		
■ Raw steel sheet	0.20 [-]	
■ Laminated plastic/wood	0.25 [-]	
■ Steel roller	0.20 [-]	
■ Rubberized roller	0.30 [-]	
Max. production width	1200 mm	47 in.

**SUITABLE FOR**

Corrugated carton: flexo-folding  
Corrugated carton: stacking


**FEATURES**

Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	yes
Chemical resistances (see file available on line)	6

**COMPLIANCES**

REACH Regulation EC 1907/2006 and amendments

**NOTES**

Issue: 10-10-2011

Last Update: 23-06-2016

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

**CODE NA-1137**
**TYPE**
**2T12 U0-G35 HS GP**
**• Recommended joining procedure**
**SKIVED JOINT '4'**

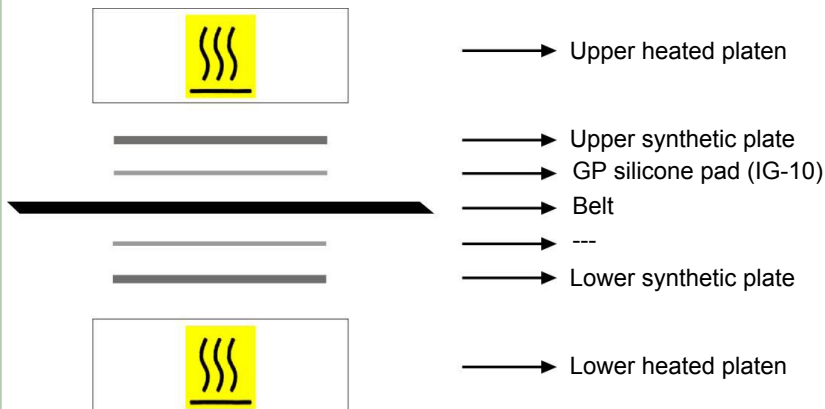

Check our general catalogue to get further info on CHIORINO joining methods.

**• Skiving instructions**

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
<b>B600 A</b>	5,8	65	Diagonal	1.5-10	---	0	18,3	110	---	15	14,35	118
<b>B300 SA</b>	---	---	---	---	---	---	---	---	---	---	---	---

**• Guide to the use of adhesives**

Pour the **I hardener** with the **R cement** (pot-life 2 hours).  
 Apply a thin layer of above mix on both splices.  
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.  
 Press according to the instructions shown.  
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.  
 Kit: **SINTECOL**

**• Layout of components**


Press settings	
Upper platen temperature	100 °C
Lower platen temperature	100 °C
Curing time in press	20 min.
Driving torque	30
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

**• Notes**

Issue: 18-06-2011

Last Update: 30-01-2014

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.