

**CONVEYOR AND PROCESS BELTS**
**TECHNICAL DATA SHEET**

<b>CODE</b>	<b>NA-1255</b>	<b>TYPE</b>	<b>2M10 U0-U2 N HC SP</b>
-------------	----------------	-------------	---------------------------

COMPOSITION	
<b>Conveying surface</b>	Material: Polyurethane (TPU)
	Thickness: 0.20 mm    0.008 in.
	Surface pattern: Smooth
	Colour: Black
	Coefficient of friction: LF
<b>Textile carcass</b>	Material: Polyester (PET)
	Plies no.: 2
	Weft type: Rigid
<b>Driving surface</b>	Material: Fabric with polyurethane (TPU) impregnation
	Thickness: --- mm    --- in.
	Surface pattern: Fabric
	Colour: Grey



TECHNICAL SPECIFICATIONS			
Total thickness		1.20 mm	0.05 in.
Weight		1.20 kg/m <sup>2</sup>	0.24 lbs./sq.ft
Elongation at 1%		10 N/mm	57.0 lbs./in.
Max. admissible pull		10 N/mm	57.1 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-20 °C	-4 °F
	max.	100 °C	212 °F
<sup>(1)</sup> Use of the belt with limit values may reduce its life.			
Minimum radius / diameter <sup>(2)</sup>			
■ Knife edge minimum radius		4 mm	0,16 in.
■ Bending roller min. diameter		8 mm	0.31 in.
■ Counter-bending roller min. diameter		16 mm	0.63 in.
<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.			
Coefficient of friction on driving surface			
■ Raw steel sheet		0.20 [-]	
■ Laminated plastic/wood		0.25 [-]	
■ Steel roller		0.20 [-]	
■ Rubberized roller		0.30 [-]	
Max. production width		3600 mm	142 in.

SUITABLE FOR	
Textile: nonwoven	
Textile: cross-lappers	
Paper industry: tissue	
Tanning industry	
Electronic industry: components conveying	

FEATURES	
Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	yes
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	yes
Curved conveyor	no
Chemical resistances (see file available on line)	5

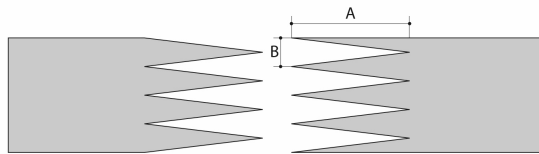
COMPLIANCES	
REACH Regulation EC 1907/2006 and amendments	

NOTES	
<b>Static conductivity (UNI EN ISO 284)</b>	
- Conveying surface 10 <sup>3</sup> to 10 <sup>5</sup> Ohm per Sqm	
K1% rel. 5 N/mm	

Issue: 10-11-2014

Last Update: 16-01-2018

**DISCLAIMER**  
 The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

**CODE NA-1255**
**TYPE**
**2M10 U0-U2 N HC SP**
**Recommended joining procedure**
**SINGLE Z**

**A = 80 mm**  
**B = 10 mm**
**Other joining methods can be used:**


---

Check our general catalogue to get further info on CHIORINO joining methods.

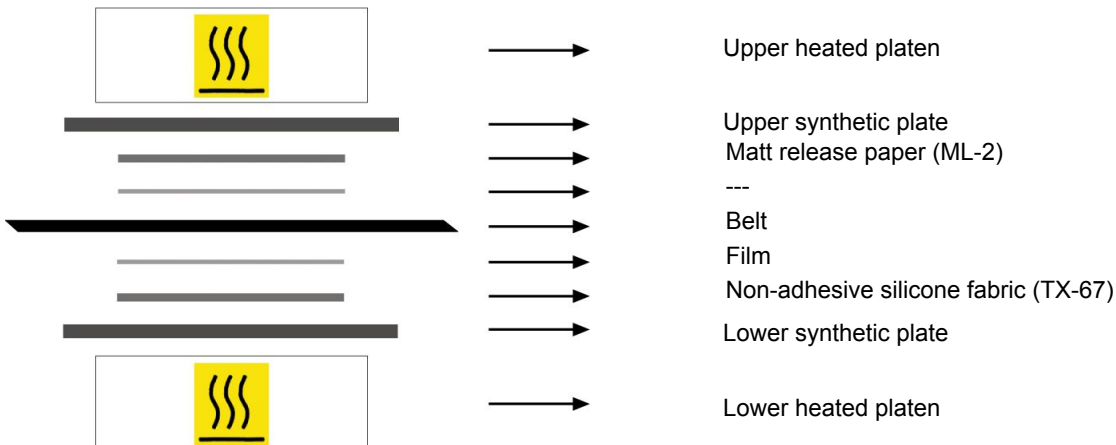
**• Pressing**
**Heating press P \ PL \ PLS**

Press settings	
Upper platen temperature	160 °C
Lower platen temperature	160 °C
Temperature gauge setting	160 °C
Curing time in press	0 min.
Pressure	2 bar
Film	TC-33 - Transparent PU film
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.
3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

**• Layout of components**

**• Notes**

Issued: 10-11-2014

Last Update: 22-03-2017

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.