

CONVEYOR AND PROCESS BELTS
TECHNICAL DATA SHEET
CODE NA-135
TYPE
N8
COMPOSITION

Conveying surface	Material	Fabric with polyurethane (TPU) impregnation	
	Thickness	--- mm	--- in.
	Surface pattern	Fabric	
	Colour	Green	
	Coefficient of friction	LF	

Textile carcass	Material	Polyamide (PA)	
	Plies no.	3	
	Weft type	Flexible	

Driving surface	Material	Fabric with polyurethane (TPU) impregnation	
	Thickness	--- mm	--- in.
	Surface pattern	Fabric	
	Colour	Green	

TECHNICAL SPECIFICATIONS

Total thickness	1.00 mm	0.04 in.	
Weight	0.90 kg/m ²	0.18 lbs./sq.ft	
Elongation at 1%	3 N/mm	17.0 lbs./in.	
Max. admissible pull	6 N/mm	34.0 lbs./in.	
Temperature resistance ⁽¹⁾	min.	-20 °C	-4 °F
	max.	100 °C	212 °F

⁽¹⁾ use of the belt with limit values may reduce its life

Minimum roller diameter ⁽²⁾		
■ Knife edge	no	
■ Bending roller	15 mm	0.6 in.
■ Counter-bending roller	15 mm	0.6 in.

⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended


Coefficient of friction on driving surface

■ Raw steel sheet	0.20 [-]
■ Laminated plastic/wood	0.25 [-]
■ Steel roller	0.20 [-]
■ Rubberized roller	0.30 [-]

Max. production width	1200 mm	47 in.
-----------------------	---------	--------

SUITABLE FOR

Paper industry: cutters
 Printing and graphic: stacking
 Printing and graphic: insertion cassettes wind./unwinding
 Printing and graphic: gathering
 Printing and graphic: wrapping / binding
 Packaging

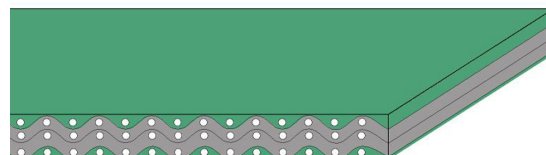
FEATURES

Humidity influence	yes
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	yes
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	yes
Curved conveyor	no
Chemical resistances (see file available on line)	5

COMPLIANCES

REACH Regulation EC 1907/2006 and amendments

NOTES

Issue: 24-07-2009

Last Update: 23-06-2016

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE NA-135

TYPE

N8

• Recommended joining procedure

SKIVED JOINT '1'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	1,1	30	Straight	2-10	---	-10	17,95	90	---	---	---	---
B300 SA	1,1	30	Straight	2-10	43	-10	11-05	(*)	---	---	---	---

• Guide to the use of adhesives

Apply the **K cement** on the polyamide part of the splices.
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.
 Press according to the instructions shown.
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.
 Kit: **NAILCOL**

• Layout of components

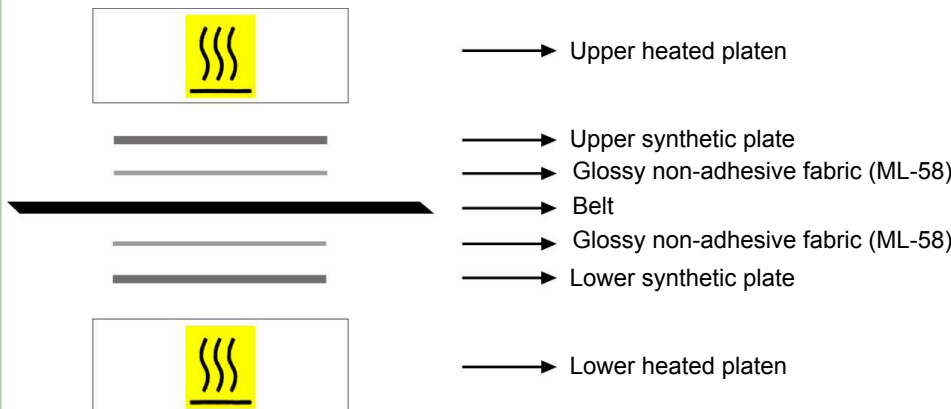

Press settings	
Upper platen temperature	85 °C
Lower platen temperature	85 °C
Curing time in press	5 min.
Driving torque	30
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

(*) Attention: do not overcome the bloc

Issue: 30-09-2005

Last Update: 30-01-2014

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.