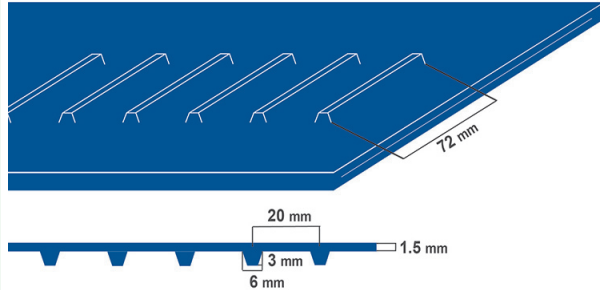


CODE NA-1481F_D6

TYPE
HP Compact Minidrive 15/20 A blue
COMPOSITION

PRODUCT SYSTEM


Description	Compact belt with traction core treated to avoid waving, timing profile on the drive side	
Material	Polyurethane (TPU) - HP® system	
Thickness	1.50 mm	0.06 in.
Weight	1.70 kg/m ²	+ 0.11 kg/m (for row of teeth)
	0.35 lbs./sq.ft	+ 0.07 lbs./ft (for row of teeth)
Surface pattern	Smooth	
Colour	HP® blue	

TECHNICAL SPECIFICATIONS

Elongation at 1%	10 N/mm	57 lbs./in.
Pitch	20 ± 0.4 mm	0.79 ± 0.16 in.
Temperature resistance ⁽²⁾	min. -30 °C	-22 °F
	max. +90 °C	194 °F
⁽¹⁾ Use of the belt with limit values may reduce its life		
Max. production width	800 mm	31 in.
Minimum roller diameter:		
■ Bending roller	20 mm	0.8 in.
■ Counter-bending roller	50 mm	2.0 in.
Coefficient of friction:		
■ Stainless steel - dry/wet	0.50/0.42 [-]	
■ UHMW ⁽²⁾ - dry/wet	0.42/0.35 [-]	

⁽²⁾UHMW = Ultra High Molecular Weight

FEATURES

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	no
Static conductivity (UNI EN ISO 284)	no
C.I.P. (Clean In Place)	yes
Conveying on plastic strips UHMW ⁽²⁾	yes
Conveying on rollers	yes
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	no
Curved conveyor	no
Chemical resistances (see file available on line)	12

COMPLIANCE

REACH Regulation EC 1907/2006 and amendments
Regulation EC 1935/2004 and amendments
Regulation EC 2023/2006 and amendments
Regulation EU 10/2011 and amendments
FDA (Food and Drug Administration)
Regulation NSF/ANSI 3-A 14159-3-2014 and amendments

SUITABLE FOR

Food industry
Packaging

NOTES

Thanks to the outstanding resistance to abrasion, oils, fats, detergents and to the most aggressive cleaning procedures, the HP product system is specially recommended for applications that require compliance with HACCP (Hazard Analysis and Critical Control Point) and IFS (International Food Standard).

Issue: 13-07-2018

Last Update: 19-07-2018

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.