


CONVEYOR AND PROCESS BELTS

TECHNICAL DATA SHEET

CODE	NA-39		TYPE	3M30 U0-V25 RT	
COMPOSITION					
Conveying surface	Material	PVC 65 Sh.A (±5)			
	Thickness	2.50 mm	0.098 in.		
	Surface pattern	RT			
	Colour	Green			
	Coefficient of friction	MF			
Textile carcass	Material	Polyester (PET)			
	Plies no.	3			
	Weft type	Rigid			
Driving surface	Material	Fabric with polyurethane (TPU) impregnation			
	Thickness	---	mm	---	in.
	Surface pattern	LdB fabric			
	Colour	Grey			
TECHNICAL SPECIFICATIONS					
Total thickness	6.60 mm	0.26 in.			
Weight	7.80 kg/m ²	1.59 lbs./sq.ft			
Elongation at 1%	30 N/mm	171.0 lbs./in.			
Max. admissible pull	60 N/mm	343.0 lbs./in.			
Temperature resistance ⁽¹⁾	min.	-10 °C	14 °F		
	max.	60 °C	140 °F		
⁽¹⁾ Use of the belt with limit values may reduce its life.					
Minimum radius / diameter ⁽²⁾					
■ Knife edge minimum radius	no				
■ Bending roller min. diameter	200 mm	7.87 in.			
■ Counter-bending roller min. diameter	300 mm	11.81 in.			
⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended.					
Coefficient of friction on driving surface					
■ Raw steel sheet	0.20 [-]				
■ Laminated plastic/wood	0.25 [-]				
■ Steel roller	0.20 [-]				
■ Rubberized roller	0.30 [-]				
Max. production width	2000 mm	79 in.			
SUITABLE FOR					
Ceramic industry					
Marble and granite industry					
Steel blankets magnetic elevators					
FEATURES					
Humidity influence	no				
Suitable to metal detector	yes				
Permanent antistatic dynamically (UNI EN ISO 21179)	no				
Static conductivity (UNI EN ISO 284)	no				
Conveying on skid bed	yes				
Conveying on rollers	yes				
Conveying on skid bed on top and return	no				
Troughed conveying	no				
Swan neck conveying	no				
Inclined conveying	yes				
Accumulators belts	no				
Curved conveyor	no				
Chemical resistances (see file available on line)	3				
COMPLIANCES					
REACH Regulation EC 1907/2006 and amendments					
Regulation EC 1935/2004 and amendments					
Regulation EC 2023/2006 and amendments					
Regulation EU 10/2011 and amendments					
FDA (Food and Drug Administration)					
NOTES					

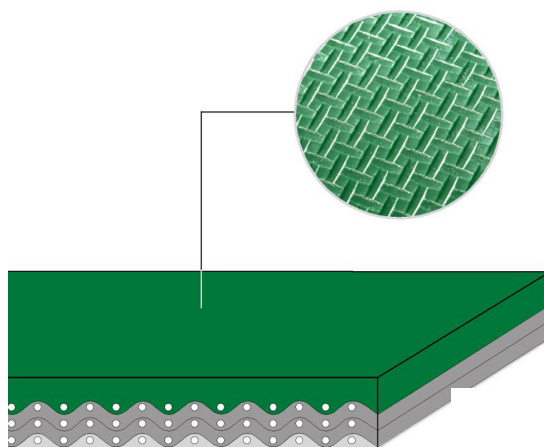

Issue: 24-07-2009

Last Update: 23-06-2016

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA-39** TYPE **3M30 U0-V25 RT**

Recommended joining procedure STEP



Other joining methods can be used:
SKIVED JOINT '2'

Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing

Heating press **P \ PL \ PLS**


Press settings	
Upper platen temperature	180 °C
Lower platen temperature	180 °C
Temperature gauge setting	180 °C
Curing time in press	4 min.
Pressure	2 bar
Film	none
Cement	VG

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.
3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

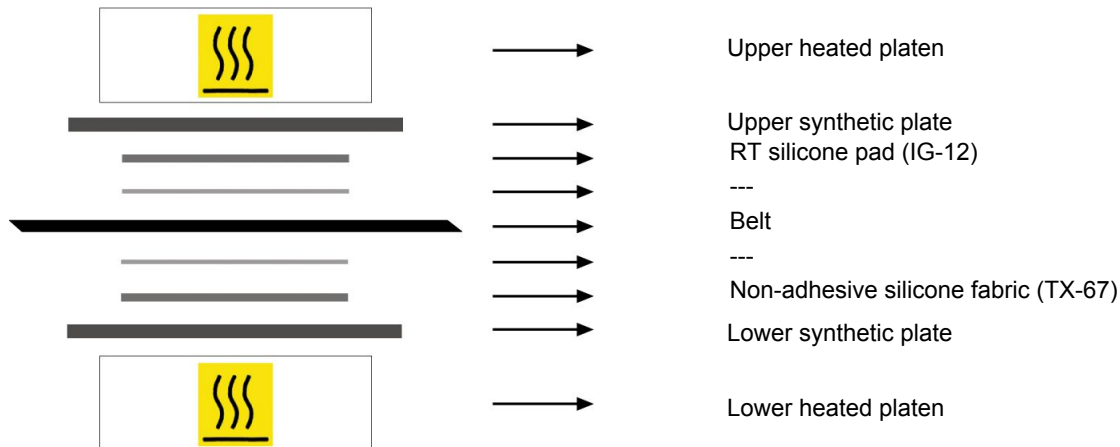

• Notes

Issued: 14-02-2005

Last Update: 30-01-2014

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.