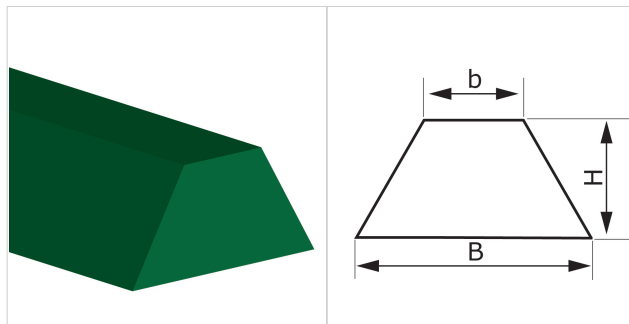


**CODE ES17**
**TYPE**
**K30 P**
**DESCRIPTION**

Profiles mainly fitted on conveyor belts as guides.


**TECHNICAL SPECIFICATIONS**

Material Polyvinyl chloride (PVC)

Hardness 60 ±5 Sh.A

Colour Green

Base Flat

B Upper base 30.0 mm 1.18 in.

b Bottom base 16.0 mm 0.63 in.

H Height 15.0 mm 0.59 in.

Weight 474 gr/m 0.421 oz/in.

Minimum pitch

■ longitudinal	60 mm	2.4 in.
■ transversal	60 mm	2.4 in.

Minimum pulley diameters<sup>(1)</sup>

■ longitudinal-driving side	220 mm	8.7 in.
■ longitudinal-conveying side	350 mm	13.8 in.
■ transversal-conveying side	--- mm	--- in.

<sup>(1)</sup> Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance <sup>(2)</sup>	min.	-10 °C	14 °F
	max	60 °C	140 °F

<sup>(2)</sup> Use with limit values may reduce its life

Roll/bar sizes 30.0 m 98.4 ft

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments

**METHOD OF APPLICATION**

- Hot air welding
- High frequency welding

**NOTES**

Issue: 22-01-2020

Last Update: 22-01-2020

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.