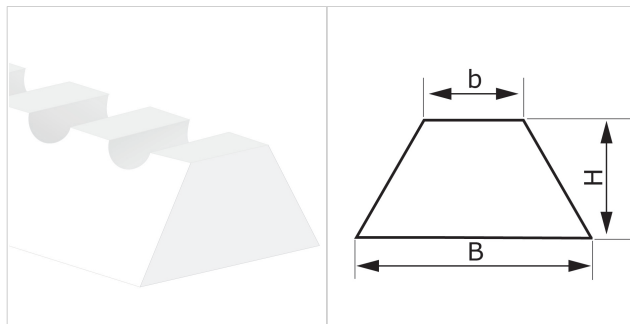


CODE ES293
TYPE
KN17 U P W
DESCRIPTION

Knotched profile can be used on smaller roller diameters.


TECHNICAL SPECIFICATIONS

Material Polyurethane (TPU)

Hardness 85 ±5 Sh.A

Colour White

Base Flat

B Upper base 17 mm 0.67 in.

b Bottom base 9 mm 0.35 in.

H Height 11 mm 0.43 in.

Weight 141 gr/m 0.125 oz/in.

Minimum pitch

■ longitudinal 45 mm 1.8 in.

■ transversal 45 mm 1.8 in.

Minimum pulley diameters⁽¹⁾

■ longitudinal-driving side 120 mm 4.7 in.

■ longitudinal-conveying side 195 mm 7.7 in.

■ transversal-conveying side --- mm --- in.

⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance ⁽²⁾ min. -20 °C -4 °F

max 60 °C 140 °F

⁽²⁾ Use with limit values may reduce its life

Roll/bar sizes 100.0 m 328.0 ft

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
HACCP (Hazard Analysis and Critical Control Points)
FDA (Food and Drug Administration)

METHOD OF APPLICATION

- Hot air welding
- High frequency welding

NOTES

Issue 22-01-2020

Last Update: 22-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.