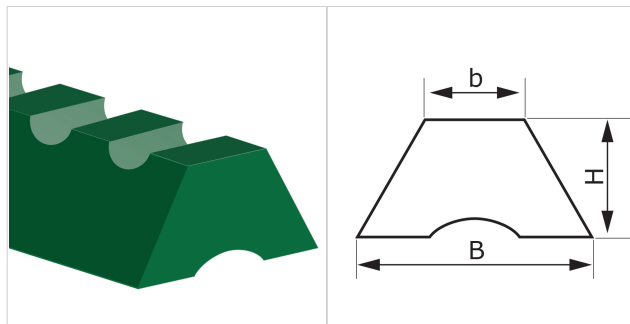


CODE ES44
TYPE
KN13
DESCRIPTION

Knotched profile can be used on smaller roller diameters.


TECHNICAL SPECIFICATIONS

Material Polyvinyl chloride (PVC)

Hardness 60 ±5 Sh.A

Colour Green

Base Grooved

B Upper base 13.0 mm 0.51 in.

b Bottom base 7.0 mm 0.28 in.

H Height 8.0 mm 0.31 in.

Weight 86 gr/m 0.076 oz/in.

Minimum pitch

| | | |
|----------------|-------|---------|
| ■ longitudinal | 45 mm | 1.8 in. |
| ■ transversal | 45 mm | 1.8 in. |

Minimum pulley diameters⁽¹⁾

| | | |
|-------------------------------|--------|---------|
| ■ longitudinal-driving side | 50 mm | 2.0 in. |
| ■ longitudinal-conveying side | 80 mm | 3.2 in. |
| ■ transversal-conveying side | --- mm | --- in. |

⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C

| | | | |
|---------------------------------------|------|--------|--------|
| Temperature resistance ⁽²⁾ | min. | -10 °C | 14 °F |
| | max | 60 °C | 140 °F |

⁽²⁾ Use with limit values may reduce its life

Roll/bar sizes 150.0 m 492.0 ft

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

METHOD OF APPLICATION

- Hot air welding
- High frequency welding

NOTES

Issue: 22-01-2020

Last Update: 22-01-2020

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.