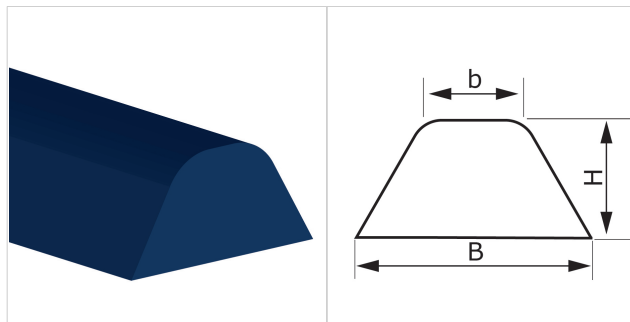


CODE ES784
TYPE
K13 U P HP blue 55 MD
DESCRIPTION

Profiles mainly fitted on conveyor belts as guides.


TECHNICAL SPECIFICATIONS

Material Polyurethane (TPU) - HP® system

Hardness 55 ±5 Sh.D

Colour HP® blue

Base Flat

B Upper base 13.0 mm 0.51 in.

b Bottom base 7.0 mm 0.28 in.

H Height 8.0 mm 0.31 in.

Weight 110 gr/m 0.098 oz/in.

Minimum pitch

■ longitudinal	45 mm	1.8 in.
■ transversal	45 mm	1.8 in.

 Minimum pulley diameters⁽¹⁾

■ longitudinal-driving side	85 mm	3.4 in.
■ longitudinal-conveying side	140 mm	5.5 in.
■ transversal-conveying side	--- mm	--- in.

⁽¹⁾ Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance ⁽²⁾	min.	-30 °C	-22 °F
	max	80 °C	176 °F

⁽²⁾ Use with limit values may reduce its life

Roll/bar sizes 150.0 m 492.0 ft

COMPLIANCES

 REACH EC 1907/2006 Regulation and Amendments
 EC 1935/2004 Regulation and Amendments
 EC 2023/2006 Regulation and Amendments
 EU 10/2011, 2017/752 Regulation and Amendments
 HACCP (Hazard Analysis and Critical Control Points)
 FDA (Food and Drug Administration)
 NSF/ANSI 3-A 14159-3-2014 Regulation and Amendments

METHOD OF APPLICATION

- Hot air welding
- High frequency welding

NOTES

Issue: 9-12-2020

Last Update: 14-05-2021

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.