

<b>CODE</b>	<b>NA-140</b>	<b>TYPE</b>	<b>CNG</b>
-------------	---------------	-------------	------------

COMPOSITION	
Conveying surface	Material: Synthetic elastomer
	Thickness: 0.10 mm    0.004 in.
	Surface pattern: Smooth
	Colour: Green
	Coefficient of friction: MF
Textile carcass	Material: Polyamide (PA)/cotton fabric
	Plies no.: 2
	Weft type: Flexible
Driving surface	Material: Polyamide (PA)/cotton fabric
	Thickness: --- mm    --- in.
	Surface pattern: Fabric
	Colour: Grey



TECHNICAL SPECIFICATIONS			
Total thickness		0.70 mm	0.03 in.
Weight		0.70 kg/m <sup>2</sup>	0.14 lbs./sq.ft
Elongation at 1%		2 N/mm	11.0 lbs./in.
Max. admissible pull		4 N/mm	22.8 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-20 °C	-4 °F
	max.	100 °C	212 °F
<sup>(1)</sup> use of the belt with limit values may reduce its life			
Minimum roller diameter <sup>(2)</sup>			
■ Knife edge		no	
■ Bending roller		20 mm	0.8 in.
■ Counter-bending roller		25 mm	1.0 in.
<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended			
Coefficient of friction on driving surface			
■ Raw steel sheet		0.20 [-]	
■ Laminated plastic/wood		0.25 [-]	
■ Steel roller		0.20 [-]	
■ Rubberized roller		0.30 [-]	
Max. production width		1200 mm	47 in.

SUITABLE FOR
Textile: spindle tapes

FEATURES	
Humidity influence	yes
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	6

COMPLIANCES
REACH EC 1907/2006 Regulation and Amendments

NOTES

Issue: 24-07-2009

Last Update: 23-06-2016

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA-140**

TYPE

**CNG**

• Recommended joining procedure SKIVED JOINT '1'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover				
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate	
<b>B600 A</b>	0,7	15	Straight	1.10	25	-10	19,95	---	---	---	---	---	---
<b>B300 SA</b>	0.70,7	15	Straight	1.10	28	-10	12-14	---	---	---	---	---	---

• Guide to the use of adhesives

Apply the **K cement** on the polyamide part of the splices.  
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.  
 Press according to the instructions shown.  
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.  
 Kit: **NAILCOL**

• Layout of components

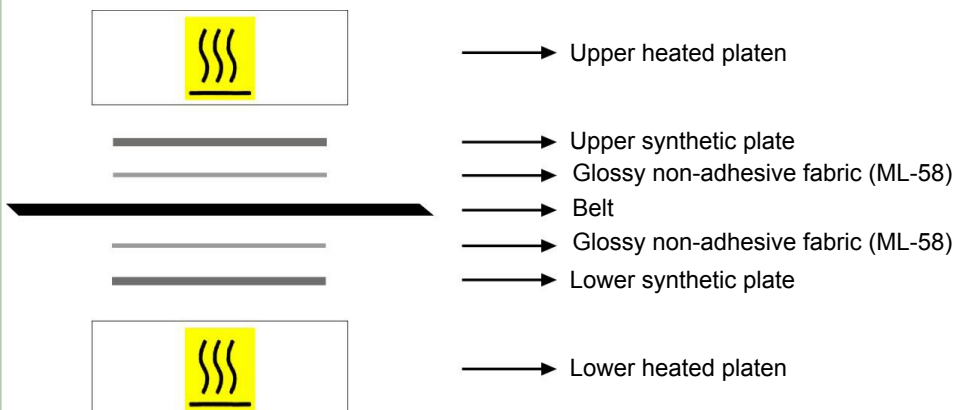

Press settings	
Upper platen temperature	100 °C
Lower platen temperature	100 °C
Curing time in press	5 min.
Driving torque	30
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

To prevent the joint from being stiff, apply the cement only on one of the two skives.

Issue: 25-01-2006

Last Update: 30-01-2014

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.