

# 1M6 U0-V10 LG N e+

**COMPOSITION**

Conveying surface	Material	PVC 35 Sh.A (±5)			
	Thickness	1.00	mm	0.039 in.	
	Surface pattern	LG			
	Colour	Black			
	Coefficient of friction	HF			
Textile carcass	Material	Polyester (PET)			
	Plies no.	1			
	Weft type	Rigid			
Driving surface	Material	Fabric with polyurethane (TPU) impregnation			
	Thickness	---	mm	---	in.
	Surface pattern	LdB fabric			
	Colour	Light grey			

**TECHNICAL SPECIFICATIONS**

Total thickness	1.60 mm	0.06 in.
Weight	1.75 kg/m <sup>2</sup>	0.36 lbs./sq.ft
Elongation at 1%	6 N/mm	34.0 lbs./in.
Max. admissible pull	6 N/mm	34.0 lbs./in.
Temperature resistance <sup>(1)</sup>	min.	-10 °C
	max.	60 °C

<sup>(1)</sup> Use of the belt with limit values may reduce its life.

**Minimum radius / diameter <sup>(2)</sup>**

■ Knife edge minimum radius	no
■ Bending roller min. diameter	20 mm 0.79 in.
■ Counter-bending roller min. diameter	25 mm 0.98 in.

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended.

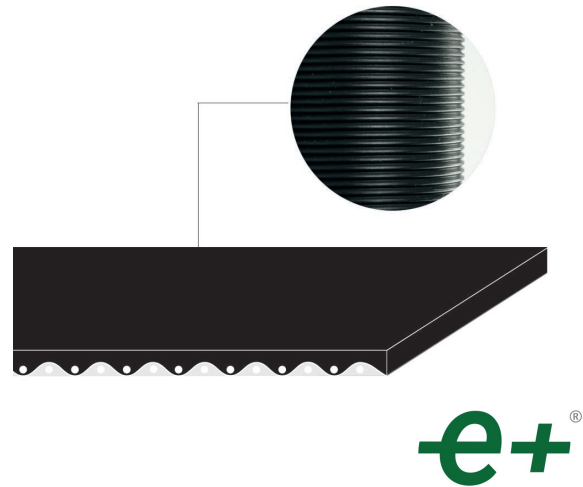
**Coefficient of friction on driving surface**

■ Raw steel sheet	0.13 [-]
■ Laminated plastic/wood	0.20 [-]
■ Steel roller	0.13 [-]
■ Rubberized roller	0.20 [-]

Max. production width	2000 mm	79 in.
-----------------------	---------	--------

**SUITABLE FOR**

Airports  
Materials handling


**FEATURES**

Humidity influence	no
Suitable to metal detector	yes
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	2

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments

**NOTES**

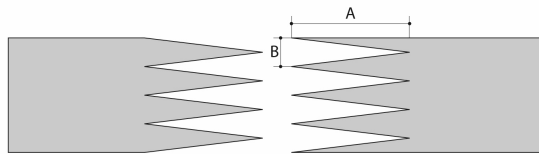
PRODUCT CODE NA1638

Last Update: 02-03-2021

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

# 1M6 U0-V10 LG N e+

**Recommended joining procedure**
**SINGLE Z - 80 x 10 mm**


A = 80 mm  
B = 10 mm

**Other joining methods can be used:**
**DIAGONAL SINGLE Z**


---  
---  
---

Check our general catalogue to get further info on CHIORINO joining methods.

**• Pressing**
**Heating press P \ PL \ PLS**

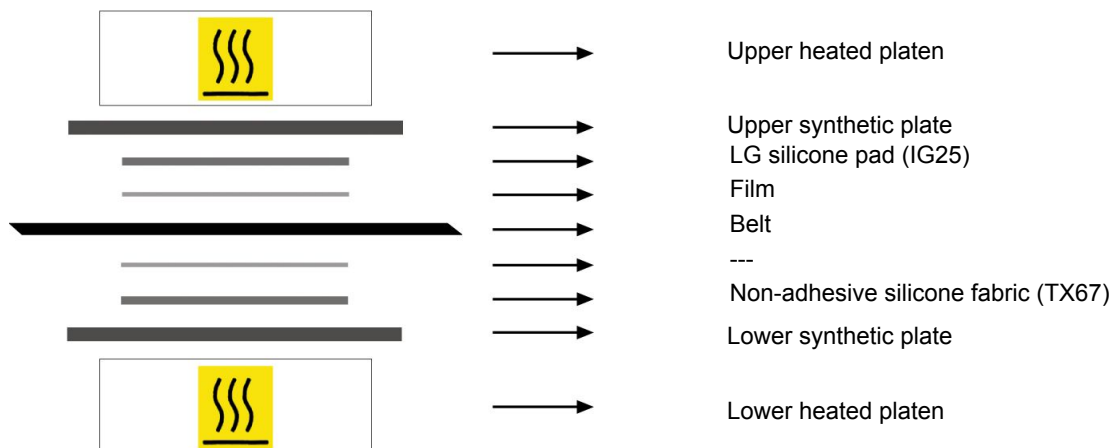
Press settings	
Upper platen temperature	170 °C
Lower platen temperature	130 °C
Temperature gauge setting	130 °C
Curing time in press	3 min.
Pressure	2,5 bar
Film	TC673 - Film PVC FR
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

**• Layout of components**

**• Notes**
**PRODUCT CODE NA1638**
**Last Update: 28-01-2021**
**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.