

<b>CODE</b>	<b>TX38</b>	<b>TYPE</b>	<b>SG0-D</b>
-------------	-------------	-------------	--------------

**STRUCTURE**

**External covering**

Material	Synthetic elastomer
Surface pattern	Smooth and grinded
Special execution	High shore hardness
Colour	Light grey
Hardness	75 ±5 Sh.A

**Textile carcass**

Material	Polyester (PET)
----------	-----------------

**TECHNICAL SPECIFICATIONS**

Total thickness	2.3 mm	0.09 in.
Weight	2.1 kg/m <sup>2</sup>	0.43 lbs./sq.ft
Tensile strength	60 N/mm	343 lbs./in.
Temperature resistance (1)	min -10 °C max 120 °C	14 °F 248 °F

(1) Use of the roller covering with limit values may reduce its life


**ROLL SIZES**

Length	115 m	4528 in.
Width (2)	50 mm	2 in.
	70 mm	3 in.

(2) Other widths upon request

**SUITABLE FOR**

- Textile: finishing
- Textile: rameuse (tenter frames)

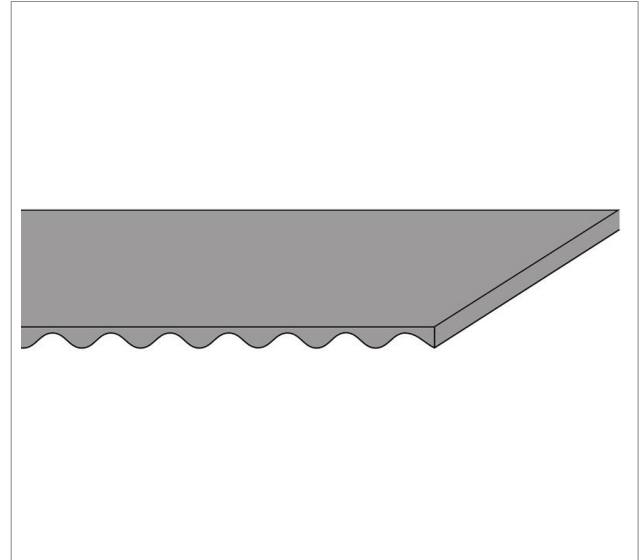

**ADHESIVES**

- To glue the covering to the roller it is recommendable to use the single-component adhesive TEXCOL CHIORINO

**FEATURES**

- Good adhesion
- Resistance to oils

**COMPLIANCES**

REACH Regulation EC 1907/2006 and amendments

**NOTES**

Self-adhesive/A version available

Issue: 26-09-2006

Last Update: 2-1-2018

**DISCLAIMER**

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.